VON DUPRIN 88 SERIES RIM DEVICE



All Special Order

The sleek versatile 88 series is constructed of cast aluminum, bronze, and stainless steel. All devices in this series are UL rated for accident hazard and casualty hazard.

The patented 88 rim series is reversible and fits doors up to 3'8" wide. Roller strike #299 is included. Cylinders are also included; uses Von Duprin #3216 rim type with Schlage "C" keyway. Has dogging feature for push-pull operation. Packed stock-size knocked down, one per box.


Avail. Finishes: US26, US26D, US3, US4, US10B, US10, SPBLK

<u>Dimensions</u>

Crossbar Length (field sizable)	42"
Crossbar Tubing	1" O.D.
Crossbar Ht. from finished floor	36-13/16"
Crossbar Proj Neutral	4-3/4"
Depressed	4"
Lock stile case8-1/4" x 2-3/4"	' x 15/16"
Hinge stile case6" x 1-3/4"	' x 15/16"

Using Standard Trim	Backset of O.S. Trim	Min. W of stile
Single door using 263 strike	* 2-7/8"	* 4-1/8"
Single door using 1405 J strike	* 2-1/8"	* 3-3/8"
With Von Duprin mullion	3"	4-1/4"
* When stop is 1/2"		

88 SERIES STANDARD TRIM EO (Exit Only) - No Trim / See next page for jamb details





Night Latch Key retracts latchbolt

11
-
88TP
Thumb Piece
Key locks
thumbpiece



	<u>Code</u>	<u>List/ea</u>
0	88DT-4	\$ 1200
	88DT-26	1600
(T)	88EO-4	1100
	88EO-26D	1160
	88NL-4	1339
	88NL-26D	1400
88K	88TP-4	1350
Knob	88TP-26D	1400
Key locks knob	Includes Schlage ' where applicable	"C" Cylinder

88 SERIES VERTICAL ROD DEVICES - All Special Order

These stylish vertical rod devices display quality of design, material, and workmanship. UL rated and reversible, they will fit doors up to 3'8" wide. Price includes cylinder.

Avail. Finishes: US26, US26D, US3, US4, US10B, US10, SPBLK packed stock size, knocked down, one set/box.

		Ê.	
4	i i	325	
-		ano	
		e	

Inactive

	Other Trims and Finishes Available	EO	TP
	<u>Code</u>		<u>List/ea</u>
0	8827EO-4		\$ 1237
	8827EO-26D		1640
	8827TP-4		1078
Active (specify trim)	8827TP-26D		1111

Dealer No. C

Patented features include a bottom latch which combines hinged bolt and deadbolt operations, and fits all conventional still conditions. Sets are furnished with 299 top strike and 248BL-4, 304L bottom strikes. Uses Von Duprin #3216 rim with Schlage "C" keyway cylinders. Dogging feature, packed stock size, knocked down, one set/box.

Dimensions


Floating Axles Dia	3/8"
Crossbar Length (field sizable)	42"
Crossbar Tubing	1" O.D.
Crossbar Ht. from finished floor	13-13/16"
Crossbar Proj Neutral	4-3/4"
Depressed	4"
Lock stile case8-1/4" x 2-3/4"	' x 15/16"
Hinge stile case6" x 1-3/4"	x 15/16"
Vertical rods 1/2" O.	D. tubing

Double doors require divergent bevels



PANIC HARDWARE

VERTICAL ROD & RIM DEVICE COMBINATIONS - 88 SERIES



Inactive


DOOR HANDING

4

Active

DOUBLE DOORS without mullions may be fitted with a combination of vertical rod and standard rim devices with the addition of the 1609 strike. 88 Series devices may be used in this way.

88 Series Single Door w/ 299 Strike




Strike adjusts up to 3/8" for warpage of door

ships standard with 88 rim device



27/8" 73mm) 88 Series Double Door w/ 1609 Strike



1609 Strike

Code

1609-10

1609-26D

Use for rim/vertical rod combination


Special Order



List/ea

\$ 90.00

90.00



<u>Finish</u>

Dull Bronze

Dull Chrome

reve	hand rse ntation			Right hand reverse orientation
	LHR (Left hand r	everse)	RHR (Right hand r	everse)

Outside

299 Strike

PANIC HARDWARE

VON DUPRIN 99 SERIES RIM / VERTICAL ROD DEVICE

All Special Order

99 Rim exit device (w/ grooved case) for all types of single and double doors with mullion, UL listed for panic exit hardware. For Double Doors use 2 each Vertical Rod Devices, OR 2 each Rim Devices with a mullion.

Devices are ANSI A156.3 – 2008 Grade 1. Rim device is non-handed except when the following device options are used: SD (special dogging), -2 (double cylinder) or SS (signal switch). Covers stock hollow metal doors with 86 or 161 cutouts on single doors (may cover cutouts on pairs – consult template).

Avail. Finishes: US3, US3A, US4, US4A, US10, US26, US26D, US26D-AM Antimicrobial, US28, 313, 315 & 643E.

99 SERIES STANDARD TRIM EO (Exit Only) - No Trim




990TP Rim or 9927TP Vertical Key Locks/Unlocks

Thumbpiece




996L* Rim or 9927* Vertical

Key Locks/Unlocks Lever *Breakaway Lever





#9927 Vertical Rod Device - Surface Mounted



99EO - No Trim Exit Only Rim Device

9927EO - No Trim Exit Only Vertical Rod



VON DUPRIN #99 RIM DEVICE All Special Order

For wide stile or flush doors. Non-handed. Field sizeable, 3/4" throw, latch bolt. Latch bolt is deadlocking. Hex key dogging. Keyed trim includes Schlage "C" cylinder.

Door Requirements: 2'6" - 3' wide. Minimum Stile: 3-13/16", 1-3/4" thick.

<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
99EO-26D	Dull Chrome	\$ 1118
99EO-313	Duronodic Bronze	1036
99TP-26D	Dull Chrome	1408
99TP-313	Duro. Bronze	1337
99L-26D	Dull Chrome	1589
99L-313	Duro. Bronze	1521
4954	Mullion, up to 7' 2"	500

VON DUPRIN #9927 SURFACE MOUNTED VERTICAL TYPE ROD DEVICE - All Special Order

For all types of single or double doors. Non-handed. Field sizeable, 5/8" throw & latch bolt, deadlocking latch bolt, hex key dogging. Keyed trim includes Schlage "C" cylinder.

Door requirements: 2'6" - 3' wide Minimum Stile: 3-5/8", 1-3/4" thick, 7' high

\$ 1118	<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
1036	9927EO-26D	Dull Chrome	\$ 1616
1408	9927EO-313	Duronodic Bronze	1574
1337	9927TP-26D	Dull Chrome	1906
1589	9927TP-313	Duro. Bronze	1875
1521	9927L-26D	Dull Chrome	2087
500	9927L-313	Duro. Bronze	2059

* The Breakaway Lever design allows the lever to break away and drop to the "down" position when abused, discouraging further abuse and protecting its internal parts. The "downed" lever can then be snapped back into an operable position easily, thus preventing needless loss of door operation and costly maintenance time.

FIRE RATED, MORTISE, OR OTHER SPECIAL PANIC HARDWARE

SPECIAL PANIC HARDWARE

Von Duprin devices may be ordered for FIRE RATED doors, MORTISE applications, NARROW stiles or situations requiring special trim functions, finishes, door alarms, or remote door control systems.

Please call for more information and quotes. Lead time is usually 1-2 weeks, however, some items may take longer.

88-F Rim Fire Exit Device

88-F fire exit rim devices for all types of 4' X 8' single and 8' X 8' double doors with 9954 mullion, UL listed, 3 hours. This device is handed.

88-F	
19	

8875 Mortise lock exit device

8875 mortise lock devices or all types of single or double doors, UL listed for accident hazard installations. Fits stock hollow metal doors with 86 cutouts and door stiles as narrow as 4 3/4". Field reversible but comes handed from factory. The 7500 mortise lock is equipped with a 3/4" anti-friction latch bolt which is field reversible without removing the lock from the door. It has a non-handed auxiliary bolt for deadlocking and a faceplate with an adjustable bevel.



8875 & 8875-F (also available Fire-Rated)

🁋 99-F

99-F Rim Fire Exit Device

99-F Rim fire exit devices for all types of single doors up to 4' x 10' or 8' x 10' double doors with 9954 or 9854 mullion, UL listed for fire exit hardware. Devices are ANSI A156.3 – 2008 Grade 1.



9975 Mortise lock exit device

9975 Mortise lock device for all types of single or double doors, UL listed for Panic exit hardware. Devices are ANSI A156.3 – 2008 Grade 1. Fits stock hollow metal doors with 86 cutout and door stiles as narrow as 4 3/4". The mortise lock device is non-handed except when the following device options are used: -2 (double cylinder) or SS (signal switch). The 7500 Mortise lock is equipped with a 3/4" anti-friction latch bolt which is field reversible without removing the lock from the door. It has a nonhanded auxiliary bolt for deadlocking and a faceplate with an adjustable bevel.



9975 & 9975-F (also available Fire-Rated)




EDGE PULLS

BALDWIN EDGE PULL Solid Forged Brass

3.875" x .75" x 1.625"

Spring loaded, returns lever flush with face plate. Narrow design eliminates installation problems on thin doors. One per box with screws.



<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
0465-030	Polished Brass	\$ 16.18
0465-260	Bright Chrome	16.18
0465-102	Oil R. Bronze	16.18
0465-264	Dull Chrome	16.18
0465-050	Sat. Brass & Black	16.18
0465-150	Satin Nickel	16.18
0465-151	Antique Nickel	16.18
0465-112	Venetian Bronze	16.18
0465-402	Distr. Oil R. Bronze	17.19

IDH EDGE PULL

Solid Brass

Polished Solid Brass. Rugged construction. The 3/4" width allows installation on both narrow and standard doors. Spring automatically returns lever flush with plate.

3-7/8" x 3/4" x 1-5/8" with screws.

Pack: 10 each

<u>Code</u> 14020-003 14020-015 14020-026	<u>Finish</u> Polished Brass Satin Nickel Polished Chrome	<u>List/ea</u> \$ 9.99 11.11 10.36
14020-26D	Dull Chrome	10.36
14020-10B	Oil Rubbed Bronze	13.73

POCKET DOOR LOCKS

IDH POCKET & SLIDING DOOR LOCKS

Height: 2-3/4", Width: 2-1/2"

PASSAGE: Door pull has flush pulls on both sides. Fully adjustable for 1-3/8" to 1-3/4" thick doors. 10 each per box.



<u>Finish</u>	<u>List/ea</u>
Polished Brass	\$ 11.93
Antique Brass	13.73
Oil R. Bronze	14.22
Polished Chrome	13.73
Dull Chrome	13.73
Satin Nickel	14.22
Antique Nickel	16.48
	Polished Brass Antique Brass Oil R. Bronze Polished Chrome Dull Chrome Satin Nickel


PRIVACY: Lock and unlock by thumb turn inside pull. Emergency entry from outside. For 1-3/8" thick doors. 10 each per box.



<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
25411-003	Polished Brass	\$ 13.48
25411-005	Antique Brass	15.85
25411-10B	Oil R. Bronze	16.23
25411-026	Polished Chrome	15.85
25411-26D	Dull Chrome	15.85
25411-015	Satin Nickel	16.23
25411-15A	Antique Nickel	17.98

IVES SLIDING DOOR





Spring activated design. Mortise depth: 3/8". Emergency release of bolt from outside the door. Solid Brass. Size: 15/32" x 3-1/16" x 5/8", Strike: 1" x 3/4".

<u>Code</u>	<u>Finish</u>	<u>Ctn</u>	<u>List/ea</u>
42B10B	Oil R. Bronze	10 ea.	\$ 12.64
42B15	Satin Nickel	10	12.13
42B26D	Dull Chrome	10	12.64
42B3	Polished Brass	10	11.02


Solid Brass - Moreland Design

ERIC MORRIS MORTISE POCKET DOOR LOCK

POCKET DOOR LOCKS

PRIVACY POCKET DOOR LOCK

For 1-3/4" and 1-3/8" Thick Doors





Locks fit standard bore and setback openings in pre-bored doors. No need to alter fit.


<u>Code</u>	<u>Door Thickness</u>	<u>Finish</u>	<u>List/ea</u>
1521-3	1-3/8"	Pol. Brass	\$ 28.20
1521-26D	1-3/8"	Sat. Chrome	35.81
1534-3	1-3/4"	Pol. Brass	33.81
1534-26D	1-3/4"	Sat. Chrome	40.23

01

Interior Exterior

Privacy - 82091


Drop Ring Pull inside turns to activate latch. Emergency release outside can be activated by a coin.



Interior

Entry - 82093

Drop ring inside turns to latch or unlatch. Locks with key on outside.



Heavy Duty Steel case has a built-in edge pull. Overall size: 8" x 3-1/2" x 7/8" Recess depth: 0.25" Backset on lock box: 2.5" Case Size: 3.5" x 5.75" x 0.563" For doors 1-3/8" to 3" thick Material gauge: .04"


Each Set includes trim and mortise box.

<u>Code</u>	<u>Function</u>	<u>Finish</u>	<u>List/st</u>
82091-605E	Privacy	Lifetime Pol. Brass	\$ 365.00
82091-613	Privacy	Oil R. Bronze	296.88
82091-619	Privacy	Sat. Nickel	296.00
82093-605E	Entry	Lifetime Pol. Brass	437.00
82093-613	Entry	Oil R. Bronze	344.00
82093-619	Entry	Sat. Nickel	344.00

ERIC MORRIS OVAL FLUSH PULL

Solid Brass - Moreland Design

82010 Heavy wrought brass recessed pull



<u>Code</u>	<u>Finish</u>
82010-605	Polished Brass
82010-613	Oil Rubbed Bronze
82010-619	Satin Nickel

List/ea \$ 50.00 50.00 50.00

SLIDING DOOR LOCKS

ERIC MORRIS MORTISE POCKET DOOR LOCK Bryn Mawr Design - Special Order







nterior Ext


Interior Exterior

Entry - 82193

Privacy - 82191

Bryn Mawr Pocket Door Lock:

- Rectangular Plate with Recessed Center
- Brass Recessed Pull Ring
- Solid Forged Brass Finger Pull
- Hand Polished
- Complete sets: Passage, Privacy, Bit Key set, Single/ Double Cylinder sets and more



Heavy Duty Steel case has a built-in edge pull. Overall size: 8" x 3-1/2" x 7/8" Recess depth: 0.25" Backset on lock box: 2.5" Case Size: 3.5" x 5.75" x 0.563" For doors 1-3/8" to 3" thick Material gauge: .04"

Each Set includes trim and mortise box. Finishes available as Standard, Distressed, and PVD Brass. See below for some finish examples.

Standard:	605 (Pol. Brass), 613 (Oil R Bronze), 619 (Sat. Nickel), 626 (Sat. Chrome)
Distressed:	609D (Distr. Satin Brass), 613D (Distr. Oil R Bronze)

All Special Order.

		(Std)	(Distr)	PVD
		605, 613	609D	Brass
<u>Code</u>	<u>Function</u>	<u>619, 626</u>	<u>613D</u>	<u>605E</u>
82190	Passage	\$ 321	\$ 357	\$ 409
82191	Privacy	294	326	365
82193	Entry	344	383	437


BALDWIN SLIDING DOOR LOCKS

The Santa Monica style puts a visual emphasis on vertical and horizontal lines, with a focus on pure geometry without sacrificing comfort. Available in both Large and Small varieties in Satin Nickel and Oil Rubbed Bronze. Other finishes available special order.




PD005-150-PRIV





Min. Door Thickness: 1-3/4"





Min. Door Thickness: 1-3/8"

	<u>Code</u> PD005-XXX-PASS	<u>Description</u> Passage set w/ 2.5" backset lock	<u>Finishes</u> 102, 150	<u>List/ea</u> \$ 475.17
	PD005-XXX-PRIV	Privacy set w/ 2.5" backset lock	102, 150	540.89
	PD005-XXX-IPS	Passage Trim- Half pair	102, 150	106.16
	PD006-XXX-PASS	Passage set w/ 2.5" backset lock	102, 150	434.73
PVD rass	PD006-XXX-PRIV	Privacy set w/ 2.5" backset lock	102, 150	500.45
<u>05E</u> 409 365	PD006-XXX-IPS	Passage Trim- Half pair	102, 150	85.94
437	102: Oil R Bronze	150: Satin Nicke	el	

FINGER & FLUSH PULLS

IDH FLUSH SLIDING DOOR PULL



2-1/2"	Wrought Brass. Hand polished. Overall Diameter: 2-1/2" Built-in prongs eliminate need for screws. Pack: 10 each.
Finiah	List/oo

<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
25420-003	Polished Brass	\$ 2.64
25420-005	Antique Brass	3.38
25420-015	Satin Nickel	3.18
25420-026	Polished Chrome	3.18
25420-26D	Dull Chrome	3.18
25420-10B	Oil Rubbed Bronze	3.18
25420-15A	Antique Nickel	3.13

IDH RECTANGULAR FLUSH PULL

- Premium Quality Forged Solid Brass
- Shallow depth / Low profile
- Ideal for louvered, bifold or closet doors

Length: 3-1/8", Width: 1-5/16", Depth: 5/16", Overall Depth: 3/8"

Pack: 10 each with screws



25400-015

<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
25400-003	Polished Brass	\$ 14.74
25400-005	Antique Brass	14.71
25400-015	Satin Nickel	14.71
25400-026	Polished Chrome	14.71
25400-10B	Oil Rubbed Bronze	14.71
25400-15A	Antique Nickel	14.71
25400-26D	Dull Chrome	14.71

IVES FLUSH SLIDING DOOR PULL

Wrought brass. Hand polished. Overall Dia: 2-7/16" Built-in prongs eliminate need for screws. Code Finish Ctn

<u>Code</u>	<u>Finish</u>	<u>Ctn</u>	<u>List/ea</u>
221B10B	Oil Rubbed Bronze	20	\$ 3.57
221B26	Polished Chrome	20	3.54
SP221B15	Satin Nickel	25	3.86

KV FLUSH FINGER PULLS

Overall Diameter: 31/32", Bore: 25/36", Depth: 1/4"

<u>Code</u>	<u>Finish</u>	<u>Ctn</u>	<u>List/ea</u>
801X	Brass	100	\$ 1.34
801XNP	Nickel	100	1.42

801X

BALDWIN FLUSH PULL

Solid Forged Brass

2⁷/₁₆" (61.9)

14

1-1/2" x 3-1/2" x 3/8" Deep.

Clearance required is .187" projection from mounting surface. Thickness of flange is .187". Decorative flush sliding door pull may be used as a sash lift.

Colonial design makes it suitable for Early American interiors. Extra heavy solid brass construction. Screws included. 1 ea/box.

<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
0458-030	Pol. Brass	\$ 23.25
0458-102	Oil R. Bronze	23.25
0458-150	Satin Nickel	23.25
0458-112	Venetian Bronze	23.25



0458-102

Baldwin No	. C,	Others	No.	B/C
------------	------	--------	-----	-----

FINGER AND FLUSH PULLS

IVES FLUSH PULLS

227 - Wrought Brass

Contoured for ease of pulling. Extra deep well.

3-5/8" × 1-3/4" × 9/16". With screws.

Code



227B <u>List/ea</u> Ctn \$ 7.89

9.10

8.69 9.11 9.46

> **FLUSH MOUNT** PLASTIC HANDLES

> > gray


white

black

almond

227B3	Pol. Brass	10 ea.
227B26	Pol. Chrome	10
227B15	Satin Nickel	10
227B10B	Oil R. Bronze	10
227B26D	Dull Chrome	10

Finish

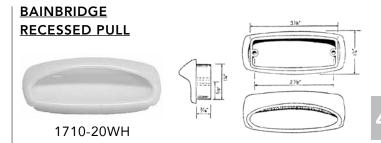

Recessed pull for all applications including lids, drawers, and doors. Plastic.

Size: 3-1/8" x 1-1/2" x 7/16" projection from mounting surface. With screws.

<u>Code</u>	<u>Finish</u>	<u>Ctn</u>	<u>List/ea</u>
1710-20BL	Black	100 ea.	\$ 2.59
1710-20WH	White	100	1.99

KV BRASS FLUSH DRAWER PULL

1-3/4"x 3-1/4	2/box with screws. "x 9/16" deep,		819X	2867 Screw C to C: 3-3/4" 260 per ctn.		4 ³ / ₁₆
with beveled	edges. Finish	<u>Ctn</u>	<u>List/ea</u>	<u>Code</u> 2867-010 2867-014	<u>Finish</u> White Black	<u>List/ea</u> \$ 2.13 2.12
<u>Code</u> 819XPB 819XANO	Pol. Brass Anochrome	12 ea. 12	\$ 11.09 10.14	2867-020 2867-029	Gray Almond	1.88 2.27
				KV THREADED FING	SER PULL	
				Two-piece screw-toge pull for glass 3/16" to 15/16" thick. 1-1/16" rim. Drill 13/16" hole glass. Anochrome fir	OD e in	836A

<u>Code</u>	<u>Ctn</u>	<u>List/ea</u>
836A	50 ea.	\$ 3.10

7/16" 3/8"

4 3/8°

FLUSH PULLS

BALDWIN FLUSH RING PULLS Solid Brass



No. 0392

1-1/4" x 1-1/2" x 5/8" ID Flat Top Ring

<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
0392-030	Polished Brass	\$ 22.24
0392-102	Oil R. Bronze	22.24
0392-260	Polished Chrome	22.24
0392-264	Satin Chrome	22.24



No. 0393 1-5/8" x 1-5/8" x

5/8" Ring ID

<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
0393-030	Polished Brass	\$ 22.24
0393-102	Oil R. Bronze	22.24
0393-260	Polished Chrome	22.24
0393-264	Satin Chrome	22.24



No. 0394 1-7/8" x 2-1/2" x

1" Ring ID

<u>Finish</u>	<u>List/ea</u>
Polished Brass	\$ 32.35
Oil R. Bronze	32.35
Polished Chrome	32.35
Satin Chrome	32.35
	Polished Brass Oil R. Bronze Polished Chrome


No. 0395

2-1/2" x 3.3" x 1-1/2" Ring ID

DELTANA FLUSH RING PULLS

Solid Brass








FRP25 2-1/2" x 1-7/8"


<u>Code</u>	<u>Finish</u>	<u>Ctn.</u>	<u>List/ea</u>
FRP175U3	Polished Brass	50 ea.	\$ 9.60
FRP175U15	Satin Nickel	50	11.68
FRP175U10B	Oil R Bronze	50	11.68
FRP25U3	Polished Brass	20	\$ 14.61
FRP25U15	Satin Nickel	20	18.93
FRP25U10B	Oil R Bronze	20	18.93

TYDIX FLUSH PULLS

TYDIX FLUSH PULLS

All Special Order







No. 61063 2" x 2-1/2"

No. 61064 4" x 2-1/2"

SINGLE PULL FOR DOORS & DRAWERS



TWO PULLS -- ONE DOOR

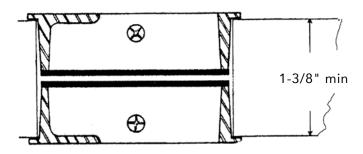

TYDIX FLUSH PULLS

All Special Order

TO ORDER, SPECIFY THE FOLLOWING:

- 1. Flush Pull Number
- 2. Finish of Face
- 3. Color Inside (Black is standard)
- 4. Backplate Color (Black is standard)

TAMPERPROOF SCREWS: Specify "TMP" and add \$ 1.32 list

TYDIX FLUSH PULL PRICING

(Other Finishes are Available - Call for Price)

	Face	Inside	
<u>Code</u>	<u>Finish</u>	<u>Finish</u>	<u>List/ea</u>
61063 US3XBLK	Pol. Brass	Black	\$ 122.00
61063 US26XBLK	Pol. Chrome	Black	106.00
61063 US26DXBLK	Dull Chrome	Black	106.00
61063 US10BXBLK	Oil R. Bronze	Black	106.00
61064 US3XBLK	Pol. Brass	Black	136.00
61064 US26XBLK	Pol. Chrome	Black	130.00
61064 US26DXBLK	Dull Chrome	Black	130.00
61064 US10BXBLK	Oil R. Bronze	Black	130.00




^{15/16}" (23.8)

BY-PASS DOOR HARDWARE

Hettich GRANT 6034 SERIES BY-PASSING DOOR TRACK - 50/75 LBS.

See pages 418, 450-451 for more Hettich/Grant Door Hardware



For Two 3/4" or 1-3/8" Doors

- Hangers can be reversed to fit either size door
- Adjusts 1/4" vertically, Headroom 1-1/8" 1-3/8"
- For 3/4" and 1-3/8" Doors weighing up to 50 lbs/door with 6034 hdwr set, 75 lbs/door with 6064 hdwr set
- Ball-bearing wheels ensures a smooth, quiet and long lasting performance

6034 SERIES SEPARATE TRACK AND HARDWARE

Aluminum Double Track For Two 3/4" or 1-3/8" Doors

Extruded aluminum track for by-passing doors.

1-3/4" wide, 15/16" high.

<u>Code</u>	<u>Size</u>	<u>Ctn</u>	<u>List/ea</u>
6004-4	4'	5 ea	\$ 23.42
6004-6	6'	5	25.86
6004-8	8'	5	29.00
6004-12	12'	5	39.56
6004-16	16'	5	55.31

HARDWARE SETS


6034 (50 lb.) Hardware set includes:

- (2) 6320 single wheel 3/16" offset carriers
- (2) 6330 single wheel 1/2" offset carriers
- (1) 114 Nylon double floor guide & screws/instructions

6064 (75 lb.) Hardware set includes:

- (2) 6350 double wheel 3/16" offset carriers
- (2) 6360 double wheel 1/2" offset carriers
- (1) 114 Nylon double floor guide & screws/instructions

<u>Code</u>	<u>Description</u>	<u>Ctn</u>	<u>List/set</u>
6034	50 lb. Hardware Set	10 ea.	\$ 17.58
6064	75 lb. Hardware Set	10	24.44

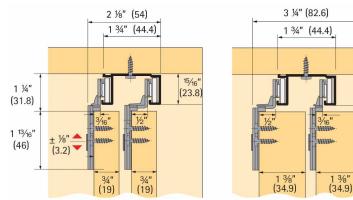

- Dual set of mounting holes; ideal for hollow core doors
- Dust free track design
- Quick door hanging by tilting pre-mounted hardware onto track profile
- Floor guide required

CARRIERS ONLY

As used in 6034/6064 hardware sets

6320	6330	6350	10	6360GR
<u>Code</u> 6320 6330	<u>Description</u> Carrier w/ 3/16" o Carrier w/ 1/2" of		<u>Ctn</u> 50 ea. 50	<u>List/ea</u> \$ 3.75 3.76
6350	Double Wheel Ca w/ 3/16" offset	rrier	50	5.42
6360GR	Double Wheel Ca w/ 1/2" offset	rrier	50	5.42

FLOOR GUIDE

Fits into slot cut into bottom of sliding doors. Hidden from view. Zinc plated zamak. 7015 3" x 7/8" x 3/4"

10 ea.	\$ 17.58	<u>Code</u>	<u>Description</u>	<u>Ctn</u>	<u>List/ea</u>
10	24.44	7015	Floor Guide w/slot	50 ea.	\$ 6.51

#114

#114

Floor guide

Floor guide

MACMURRAY PACIFIC

BY-PASSING DOOR HARDWARE

For Two 1-3/8" Doors, 60 lbs. each

1 piece single wheel door hangers for light weight or hollow core doors. Each set contains: track, hanger, guides, and pulls. Galvanized steel double "J" tracks can be cut to size.

For two 1-3/8" doors up to 60 lbs. each. 10 sets per carton.



hanger slot and turn to adjust for

plumb. Doors hold position when screws are loose to eliminate shimmina.

40-3006 46-1/2 Wide For Two 2' Doors List \$ 15.91 set


40-3008 58-1/2 Wide For Two 2'6" Doors List \$ 16.74 set


40-3010 70-1/2 Wide For Two 3' Doors List \$ 20.13 set

40-3012 93-1/2 Wide For Two 4' Doors List \$ 24.63 set



Steel Track





REPLACEMENT HANGERS



<u>Code</u>	<u>Finish</u>	<u>Size</u>	<u>Ctn</u>	<u>List/pr</u>	<u>Code</u>	<u>Ctn</u>
54-1268	Alum.	1/4" Offset	50 pr.	\$ 2.14	54-1252	10 se
54-1284	Alum.	1/2" Offset	50	2.37		

BY-PASS DOOR HARDWARE

BY-PASSING DOOR HARDWARE

For Two 3/4" or 1-3/8" Doors, 60 lbs. each

For two 3/4" or 1-3/8" by-passing doors weighing up to 60 lbs. each. Set contains: 1 aluminum track. 1 pr. 8901 hangers and 1 pr. 8902 hangers, 1 floor guide, 2 pulls, screws and instructions.




10 sets per package.

<u>Code</u>	<u>Description</u>	<u>List/st</u>
40-3020	Set for two 2' Doors	\$ 23.66
40-3021	Set for two 2' 6" Doors	25.96
40-3022	Set for two 3' Doors	30.47

TRACK ONLY Aluminum double 'J' track

<u>Code</u>	<u>Size</u>	<u>Ctn</u>	<u>List/ea</u>
54-1232	46"	10 ea	\$ 12.05
54-1236	58"	10	14.68
54-1240	70-3/8"	10	18.06
54-1264	144"	10	34.82

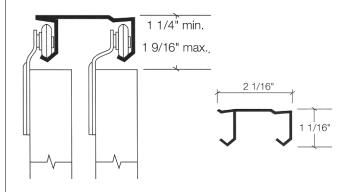

SINGLE WHEEL HANGER SET

Dealer No. B/C

Includes 1 pr. 8901, 1 pr. 8902, 1 ea. floor guide, 2 pulls, screws and instructions.

0 sets/box

List/st

\$ 5.94

SLIDING DOOR HARDWARE

HEAVY DUTY BY-PASSING DOOR HARDWARE

For installation of 2 By-Passing doors, with 1-3/8" to 1-3/4" thick panels. 150 lb. and 250 lb. capacities available.

ALUMINUM SINGLE TRACK

Use 2 tracks per by-passing set. 6', 8',10', 12' and 16' lengths available. Order hardware sets separately.



1 per Ctn.

DOOR CARRIER SETS - 150 lb or 250 lb

For 150 lb set:

2 each Tracks 1 set 40-5860 Hardware Set



40-5860 Hardware set includes : 4 ea. 4-wheel carriers, door plates, floor guide, wrench, and screws.

For 250 lb set:

2 each Tracks 2 sets 64690 Hangers 1 ea. 40-3534 Floor Guide







10 ea

<u>Features</u>

- Large 1" wheels provide smooth rolling action
- Easy-to-install snap-in feature makes hangers a "snap" to install
- Vertical adjustments can be made after installation
- Supports panels weighing up to 150 or 250 lbs
- Durable V-groove aluminum track provides smooth, quiet operation
- Track spacer allows for easy installation of bypass and tripass doors

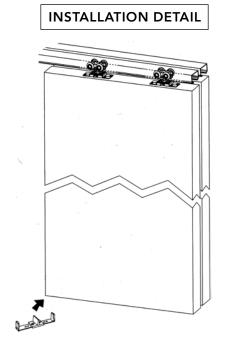



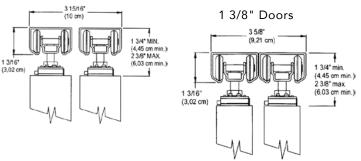

NOTE: Door height should be 2-5/8" less than finished opening height

Cross Reference

Stanley 1700 • Cox 15 • Crowder C-500 • Grant 7000 • Hager 9702 • Henderson W Series • Johnson 134F/18F • Sterling 1602

6.82 /ea

40-3534 Floor Guide



SLIDING DOOR PARTS

No. 40-5302 Heavy Duty Pivot Set:

Includes top and bottom pivots, wrench, screws, and instructions. Bottom pivot has ball-bearing raceway. Fits into 1-3/4" deep, 3/8" diameter hole in door.






52-2612

52-2620

No. 52-2612 Top Pivot: Spring-loaded, mounts in pivot and guide doors

No. 52-2620 Top Guide Wheel:

Spring-loaded and self-adjusting, mounts in guide doors.



No. 40-3993 Pocket Door Guide:

Adjusts to center door in pocket for 1-3/8" door.

No. 40-3997 Pocket Door Guide:

Adjusts to center door in pocket for 1-3/4" door.



54-1008

54-1016

No. 54-1008 Floor Guide: Adjustable for 3/4" to 1-3/8" thick by-passing doors.

No. 54-1016 Carpet Riser:

For mounting 54-1008 guide over carpeted floor. 1/2 Rise.



No. 40-5301 Four Wheel Hanger: 125 lb. load capacity. For 1-1/8" to 1-3/4" doors.

No. 40-0004 Center Stop: Attaches to track to limit panel travel. 1-5/8" L x 1-3/16" W



No. 52-2232 Adjusting Wrench:



No. 52-2236 Top Pivot Bracket:



No. 40-2309 Guide Roller: Adjustable high performance lubricated thermoplastic guide. 7/16 dia. shank



PARTS PRICE LIST

<u>Code</u>	<u>Description</u>	<u>Ctn</u>	<u>List</u>
40-0004	Center Stop	20 ea.	\$ 4.37/ea
40-2309	Guide Roller	10 ea.	4.00/ea
40-3993	P Door Guide, 1-3/8"	50 ea.	2.89/ea
40-3997	P Door Guide, 1-3/4"	50 ea.	5.90/ea
40-5301	Bi-Fold Hanger, 4 Wh	10 ea.	27.30/ea
40-5302	Bi-Fold Pivot Set	10 set	36.37/st
52-2232	Adjusting wrench	400 ea.	.39/ea
52-2236	Top Pivot Bracket	200 ea.	.70/ea
52-2612	Top Pivot	200 ea.	.51/ea
52-2620	Top Guide Wheel	200 ea.	.73/ea
54-1008	Floor Guide	50 ea.	1.74/ea
54-1016	Carpet Riser	50 ea.	1.37/ea

INSTALLATION

DETAIL

For installation

7/8" to 1-3/8" thick weighing up

to 30 lbs each.

of 2 or 4 panels,


BI-FOLD DOOR HARDWARE

STANLEY BI-FOLD DOOR HARDWARE

Load Cap: 30 lb. per panel



"Fold-Aside" Bi-Fold Door Hardware for 7/8" to 1-3/8" Hollow Core or Louver Doors to 8' High and 30 lbs. each.



For 2 and 4 Door Installations.

Stanley Bi-Fold Door Sets contain pre-finished guide track, non-mortise hinges, concealed type hardware, knobs, screws, and instructions. Guide track may be cut for non-standard openings.


<u>Features:</u>


- Spring loaded top pivot and roller guide for easy installation
- Permanently lubricated roller guide
- Durable pre-painted track
- All metal components galvanized against corrosion

<u>Code</u>	<u>Size</u>	<u>Doors</u>	<u>Ctn</u>	<u>List/set</u>
40-2032	36"	2	10 sets	\$ 28.00
40-2044	48"	4	10	38.92
40-2054	60"	4	10	41.84
40-2064	72"	4	10	44.10

<u>Cross Reference</u>


- Stanley 2400/2900 SERIES Cox 43/48 Crowder CF-100
- Grant 2600 SERIES Hendeson B Series
- Johnson 1800 Sterling 9000







Dimpled stop to limit opening of door travel



NON-MORTISE HINGE FOR BI-FOLD DOORS



Non-mortise Hinge, Steel w/ bright zinc finish, packed w/ screws.


<u>Code</u>	<u>Ctn</u>	<u>List/ea</u>
9220	100 ea	\$ 2.38

CUSTOM FOLD-A-SIDE AND ACCORDIAN DOOR HDW - 50 LB.

For 1" to 1-3/8" Folding Doors up to 50 lbs. ea. (max. two doors to a jamb)

For 1" to 1-3/8" Accordian Doors up to 30 lbs. ea. (more than two doors to a jamb)







40-2308 Pivot Set:

Includes top pivot bracket,

jamb bracket, top pivot,

bottom pivot, snugger,

wrench, screws and

instructions


Jump Proof Aluminum Track: Track has slots at four foot intervals for inserting hangers without having to cut track short of opening

Pack: 10 ea.

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
40-2321	4' track	\$ 17.35
40-2322	5' track	22.31
40-2323	6' track	25.11
40-2324	8' track	41.65
40-2326	10' track	46.95
40-2308	Pivot Set	7.03
40-2303	Hanger	9.35


Ordering Guide





Cross Reference: Stanley 2600, Crowder CF-115, Henderson HF-N

BI-FOLD DOOR HARDWARE

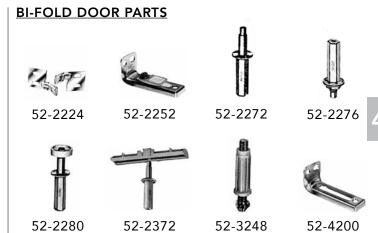

PARTS FOR THE BI-FOLD 30 LB SERIES

<u>Code</u>	Description	<u>Ctn</u>	<u>List</u>
52-2224	Surface Aligner	100	.89
52-2252	Jamb Mtg. Bracket, Alum	200	1.49
52-2272	Top Pivot, 7/16" Hole	200	.76
52-2276	Bottom Pivot, 7/16" Hole	200	1.24
52-2280	Top Guide Wheel 7/16" Hole	200	1.39
52-2372	Slide Guide	200	.73
52-4200	Jamb Mtg. Bracket	200	.73
52-3248	Bottom Pivot	200	1.49

PARTS FOR THE BI-FOLD 50 LB SERIES

52-2252	Jamb Mtg. Bracket	200	1.49
52-2272	Top Pivot, 7-16" hole	200	.76
52-2276	Bottom Pivot, 7/16"Hole	200	1.24

BI-FOLD DOOR PARTS

Hettich

GUIDE ROLLER



Steel plate, 3/4" x 2". Fasten to door bottom. 1/2" dia. roller rides in guide channel. Use with # 1222 Channel

 Code
 Ctn
 List/ea

 1211
 20 ea.
 \$ 3.96



Can be surface mounted or mortised into floor. 3/4" x 5/8" high, 3/32" thick.

<u>Code</u>	<u>Ctn</u>	<u>List/ea</u>
1222-8	5 ea.	\$ 30.86
1222-10	5	38.88
1222-12	5	46.31

Dealer No. B/C, Parts No. B/E

BI-FOLD DOOR HARDWARE

HEAVY DUTY BI-FOLD DOOR HARDWARE

Load Cap: 125 lb. per panel



Order:

 1 ea. Track
 1 ea. 40-5301 Hanger Set per pair of doors
 1 ea. 40-5302 Pivot set

For installation of 2 panels weighing up to 125 lbs. each or multi-panels weighing up to 75 lbs. each, 1-1/8" to 1-3/4" thick. For thicker panels, consult factory.





Aluminum Single Track: 6', 8, 10' 12'

Four Wheel Hanger Set: For 1-1/8" to 1-3/4" doors.

No. 40-5302 Heavy Duty Pivot Set:

Includes top and bottom pivots, wrench, screws, and instructions. Bottom pivot has ball-bearing raceway. Fits into 1-3/4" deep, 3/8" diameter hole in door.




<u>Code</u>	<u>Description</u>	<u>Ctn</u>	<u>List</u>
40-5104	72" Track	1 ea.	\$ 21.61
40-5105	96" Track	1 ea.	28.15
40-5106	120" Track	1 ea.	34.12
40-5107	144" Track	1 ea.	37.74
40-5301 40-5302	Bi-Fold Hanger, 4 Wh Bi-Fold Pivot Set	10 ea. 10 sets	\$ 27.30 36.37
40-5502	BI-FOIG FIVOL SEL	io sets	50.57

NOTE: Door height should be 2-3/4" less than the opening height.

<u>Features:</u>

- Large wheels provide smooth action
- Easy-to-install snap-in feature makes hangers a "snap" to install
- Durable V-groove aluminum track provides smooth, quiet operation
- All metal components zinc plate to guard against corrosion
- Heavy Duty pivot set designed for durability and aesthetics

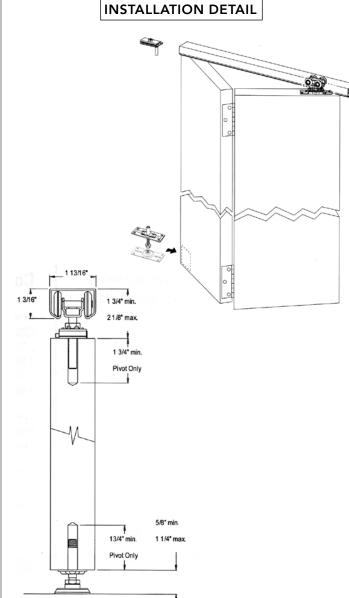

Cross Reference STANLEY 2700 • Cox 42-200 • Henderson 301H

POCKET DOOR TRACK

STANLEY POCKET DOOR TRACK SET

Load Cap: 75 lbs.





Set contains:

1 ea. 6' steel track, 1 pr. top mount hangers, Nylon door guides, door bumper, 1 ea. wrench, screws & instructions.

6 sets per pack.

<u>List/set</u> \$ 35.42

- For installation of one sliding pocket or along-the-wall door weighing up to 75 lbs.; 3/4" to 1-3/4" thick
- Pre-finished v-shaped track is jump-proof
- Adjust-n-lock, permanently lubricated, 2-wheel hangers provide up to 5/8" vertical adjustment and locks in one easy motion. Provides smooth and quiet operation
- Self-aligning wheel system

<u>Code</u>	<u>Ctn</u>	
40-3903	6 sets	




See pages 450-451 for more Hettich/Grant Door Hardware

1260 Bi-Fold - 175 lbs/door	(pg 450)
1210 Sliding Door - 225 lbs/door	(pg 450)
1230 Sliding Door - 325 lbs/door	(pg 450)
7000 By-Passing - 150 lbs/door	(pg 451)



GRANT SINGLE DOOR/ POCKET DOOR TRACK & HARDWARE Hardware for Doors up to 150 lbs.




Adjustable top mount for

and up. Order track and


door thickness of 3/4"

hardware separately.



- Top mounting with 3/4" vertical adjustment
- Headroom: 2-1/8" min, 2-7/8" max
- Extruded aluminum "I" beam track, jump proof design
- Precision ball-bearing rollers, nylon floor guide

7001 Extruded Aluminum Track







71-222 Hardware set includes: Two carriers with ball bearing wheels, two top plates with adjustable pendant bolts, one pair of floor guides, one wrench, necessary screws and installation instructions.

Accesso	ories
7.	0

occorioc



7000 Nylon carrier, steel, up to 100 lbs/door (not included in set)

7222 Top Plate w/ pendant bolt, adjustable

e **7000-15** Balllt, bearing carrier, up to 150 lbs/door



	adjustable	10 100 103/ 0001	
<u>Code</u>	<u>Description</u>	<u>Ctn</u>	<u>List</u>
7001-6	6' Track	5	\$ 31.88/ea
7001-8	8' Track	5	38.97
71-222	Hardware Set	10	65.81/st
/ 1-222	Hardware Set	10	03.01/st
7000-100	Carrier, 100 lbs.	100	7.26 /ea
7000-150	Carrier, 150 lbs.	100	21.39
7222	Top Plate	50	6.07
50101	Floor Guide	50	2.80 /pr



POCKET DOOR TRACK

POCKET DOOR TRACK

Load Cap: 150 lb. per panel

150 lb Capacity for 1" to 1- 3/4" Doors

For each Pocket Door order: 1 ea. Track 1 ea. 40-5845 Hardware Set

Features:

- Four Large 1" wheels for easy rolling action
- Easy-to-install feature makes installation a "snap"
- Easy adjustment after installation
- Cut marks on header make for easy sizing
- V-groove jump proof track





Aluminum Single Track

- Deep V-groove twin channel is jump proof
- 4', 5', 6', 8', 10', 12' lengths
- 1-3/16" H x 1-13/16" W

Consists of two 4-wheel hangers, 1 door guide, and 1 wrench.


Hardware Set 40-5845


Order Track and Hardware Set Separately

<u>Track</u>	Length	<u>Ctn</u>	List/ea
40-5109	48"	10 ea.	\$ 13.73
40-5111	60"	10	17.78
40-5113	72"	10	18.14
40-5114	96"	10	26.81
40-5106	120"	10	34.12
40-5107	144"	10	37.74
40-5107 <u>Hardware Set</u> 40-5845	144	10 <u>Ctn</u> 10 sts.	<u>List/st</u> \$ 14.45

INSTALLATION DETAIL

For installation of pocket or bi-parting doors, with 1" to 1-3/4" thick panels weighing up to 150 lbs. each.



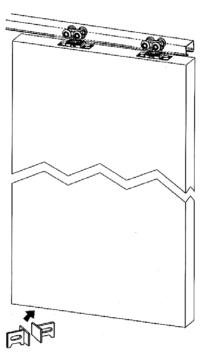

Cross Reference

Stanley 1750 • Cox 15-200 • Grant 7000 series Hager 9601/9701 • Johnson 100/111 Lawrence 506/580 track MACMURRAY PACIFIC

POCKET DOOR TRACK

HEAVY DUTY POCKET DOOR TRACK

Load Cap: 250 lb. per panel

250 lb. Capacity for 1-1/8" to 1- 3/4" Doors

For use on unusually heavy doors and in institutional installations where the very finest operation is desired. Ideal for moving space dividers, panels, and multiple doors. For doors 1-1/8" thick or more.

For each Pocket Door order:

1 ea. Track

1 pr. 64690 Hangers 1ea. Door Guide: 40-3993 for 1-3/8" 40-3997 for 1-3/4"



Top Mounting Hangers 64690 - 1 pair (2 each) 4 wheel hangers



Aluminum Single Track

- Deep V-groove twin channel is jump proof
- 6', 8', 10', 12' lengths
- 1-3/16" H x 1-13/16" W



Door Guide 40-3993 for 1-3/8" 40-3997 for 1-3/4"

Order Track and Hardware Set Separately

<u>Track</u>	<u>Length</u>	<u>Ctn</u>	<u>List/ea</u>
40-5104	72″	1 ea.	\$ 21.61
40-5105	96″	1	28.15
40-5106	120″	1	34.12
40-5107	144″	1	37.74

<u>Hardware</u>	<u>Description</u>	<u>Ctn</u>	<u>List</u>
64690	Top Mounting Hangers	1 pr	\$ 24.65/st
40-3993	Door Guide, 1-3/8"	50 ea	2.89/ea
40-3997	Door Guide, 1-3/4"	50 ea	5.90/ea


NOTE: Door height should be 2-5/8" less than the finished opening.

<u>Features:</u>

- Four large 1" wheels for easy rolling action
- Easy-to-install feature makes installation a snap
- Supports panels weighing up to 250 pounds
- Easy adjustment after installation
- Cut marks on header make for easy sizing
- V-groove jump proof track

INSTALLATION DETAIL

For installation of pocket or bi-parting doors up to 4' wide, weighing up to 250 lbs. each and up to 8' high.

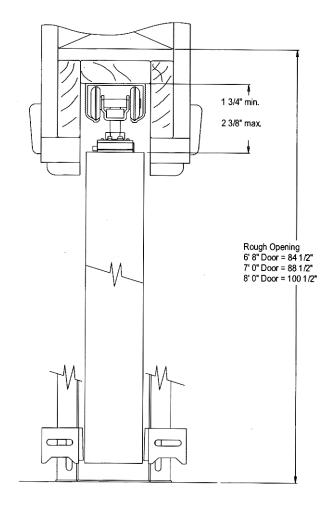


Cross Reference Stanley 735/40-3925R/40-3940 Crowder Crowderframe • Hager 9630/9631 Johnson 1500 • Sterling 1630


hnsn

JOHNSON BYPASS DOOR HARDWARE


1166 Series - Bypass Door

Bypass Track and Hardware for 3/4" or 1-3/8" doors up to **50 lbs.**





A gold colored steel bypass track. Convex track rails provide one point contact between wheel and track. One wheel (7/8" dia.) hangers with three point locking. One inch high woodtone adjustable door guide. Brass-tone steel parts. Ref. Stanley 40-3000 Series.



Bypass Hardware Set



Includes: hangers, guide and pulls. Each set is for 2 doors.

<u>Code</u> <u>Description</u> <u>List/set</u> 22310002 Bypass \$ 5.77 Hardware Set

Extra Floor Guides





<u>e Description</u> For 1-1/8" O 1-3/4" doors For 3/4" OR 1-3/8" doors

<u>List/ea</u>
\$ 2.02
.95

2200 Series - Bypass Door

Bypass Track and Hardware for 3/4" or 1-3/8" doors up to **50 lbs.**

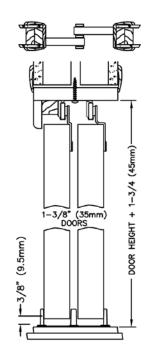



Double Track



Aluminum bypass track for quiet, smooth operation. One wheel (7/8" dia.) hangers with three point locking. Convex track for single point wheel contact. One inch high wood-tone adjustable door guide. Brass-tone steel parts. Ref. Stanley 54-1200 Series.

	<u>Track</u>	<u>Description</u>	<u>List/ea</u>
-	2200-0048	48″ - 2 doors	\$ 9.58
	2200-0060	60″ - 2 doors	11.88
	2200-0072	72″ - 2 doors	14.14
	2200-0096	96″ - 4 doors	19.25

Bypass Hardware Set



Includes: hangers, guide and pulls. Each set is for 2 doors.

<u>Code</u>	<u>Description</u>	<u>List/set</u>
22310002	Bypass Hardware Set	\$ 5.77

Extra Floor Guides


1-		<u>Code</u> 2134	<u>Description</u> For 1-1/8″ OR 1-3/4″ doors	<u>List/ea</u> \$ 2.02
	2134 2135	2135	For 3/4" OR 1-3/8" doors	.95


BI-FOLD DOORS

BYPASS DOORS

100SD Series - Bypass

Heavy Duty Bypass Track and Hardware for 1" or Thicker Doors up to **200 lbs.**







Commercial Bypass sliding door hardware set for doors weighing up to 200 lbs. each. Heavy-duty extruded aluminum box track utilizes three-wheeled ball bearing rollers (#1125) with 1" dia. machine turned wheels. Door guide is adjustable for different thicknesses of doors. (min door thickness is 1") Ref. Stanley 40-5100 Series.




Bypass Hardware Set





Floor Guide




Includes: hangers, guide, stop, pull

and wrench. Each set is for 2 doors.

Description

Bypass




<u>Code</u>


10311012

100FD Series - Bifold

ohnson

Top Mounted Bifold Hardware for 1"- 1-3/4" Thick Panels up to **75 lbs.**







Order Track and 2 Hardware sets for 4 Doors.

Commercial Bifold Hardware set for 12"- 24" panels up to 9' high weighing 75 lbs each. Convex rail aluminum track with positive pivot lock, top hung, three wheel (1" dia) ball bearing hangers and non-mortise lift off hinges. Floor bracket has a screw adjusting bottom pivot socket. Brasstone steel parts. Ref. Stanley 40-5300 Series.

	Opening		
<u>Track</u>	Size	<u>Ctn</u>	<u>List/ea</u>
100-0060	60″	25	\$ 15.40
100-0072	72″	25	18.17
100-0096	96″	10	24.59
100-0144	144″	10	38.07

Bifold Hardware Set



Includes: pivots, stop, hinges, knob, hangers, wrench and aligner. Each set is for 2 door bifold.

<u>Code</u>	Description	<u>List/set</u>
1031FD02	Bifold	\$ 31.33
	Hardware Set	

<u>Spare Parts</u> (Already included in Hardware Set)

<u>Code</u> 109PIV-S	17 Øz	<u>Description</u> Pivot Set (1 set)	<u>List</u> \$ 10.79/st
1606	-	Bifold hinges (1 pr)	2.86/pr
1808	No.	Aligner (1 set)	.61/st

4

List/set

\$ 50.17

List/ea

\$ 1.45

2610F Series - Barn Door Track

Wall Mounted Fascia Track and Hardware for 1" to 1-3/4"

Thick Door up to 125 lbs. (200 lbs. with #26311005 set)


POCKET DOORS




BARN DOOR SETS

100PD Series - Pocket Door

Commercial Grade Pocket Door Hardware for 1" or Thicker Door up to 125 lbs. (200 lbs. with #10311005 set)

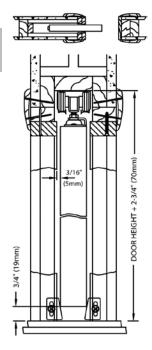



Single Track



Can be used for pocket doors or in combination with itself to make special installations of sliding doors. Aluminum track with convex rails, jump proof three wheel (1" dia.) hangers assure a smooth, quiet operation. Brass-tone steel parts. Ref. Stanley 40-5100 Series.



	Opening		
<u>Track</u>	<u>Size</u>	<u>Ctn</u>	<u>List/ea</u>
100-0060	60″	25	\$ 15.40
100-0072	72″	25	18.17
100-0096	96″	10	24.59
100-0144	144″	10	38.07
	100-0060 100-0072 100-0096	Track Size 100-0060 60" 100-0072 72" 100-0096 96"	TrackSizeCtn100-006060"25100-007272"25100-009696"10



Pocket Door Hardware Sets

Pack: 25 sets

Includes: hangers, guide, bumper and wrench. For one door.


10311002



<u>Code</u>	<u>Description</u>	<u>List/set</u>
10311002	Hardware Set, 125 lb. door	\$ 9.39
10311005	Hardware Set, 200 lb. door	22.26

10311005

HEIGHT + 3/4" (19mn 200R 5/8" (16mm) .080 . (2mm)



Single Track w/Fascia



Surface mounted hardware set for open pocket doors. Use to slide a door along the wall rather than in the wall. Aluminum track with convex rails, jump proof three wheel (1" dia.) hangers assure a smooth, quiet operation. Also includes a wall-mounted door guide. Brass-tone steel parts.

<u>Track</u>	Description	<u>List/ea</u>
2610F-0072	72", for one 3'0" door	\$47.43
2610F-0096	96", for one 4'0" door	62.80
2610F-0144	144" length track	94.05



Barn Door Hardware Sets

Includes: 2 hangers, 2 stops, 1 guide, 2 end caps and wrench. For one door.

26311003



<u>Code</u> 26311003	<u>Description</u> Hardware Set, 125 lb. door	<u>List/set</u> \$ 14.34
26311005	Hardware Set, 200 lb. door	27.14

Cross Reference

 $\overline{}$

Johnson • Stanley • Grant

Johnson	Stanley	Grant
By-Passing, Steel Track & Hardware		
1166-0048 (track)	40-3006, BPC60-00-48 (track)	
1166-0060 (track)	40-3008, BPC60-00-60 (track)	
1166-0072 (track)	40-3010, BPC60-00-72 (track)	
1166-0096 (track)	40-3012, BPC60-00-96 (track)	
22310002 (hdwe set)	54-1252, BP60-HDW-3 (hdw set)	
By-Passing, Aluminum Track & Hardware		
2200-0048 (track)	54-1232, BPC60A-00-48 (track)	6004-4
2200-0060 (track)	54-1236, BPC60A-00-60 (track)	6004-6
2200-0072 (track)	54-1240, BPC60A-00-72 (track)	6004-8
2200-0096 (track)	54-1264, BPC60A-00-96 (track)	6004-12
22310002 (hdwe set)	54-1252, BP60-HDW-3 (hdw set)	6034/6064 (50-75 lb)
Heavy Duty, By-Pass Track & Hardware		
100-0060 (track)	-	
100-0072 (track)	40-5104 (track)	7003-6
100-0096 (track)	40-5105 (track)	1201-8 7003-8
100-0144 (track)	40-5107 (track)	1201-12 7003-12
10311012 (hdw set)	150 lb. hdw set = 40-5860 250 lb. hdw set = 64690 (hangers) + 40-3534 (floor guide)	1210 (225 lb) 1230 (325 lb) 72-138/134 (150 lb)
Bi-Fold Track & Hardware		
100-0060 (track) (75 lbs/door, 2 doors)	40-2322 (track) (50 lbs/door, 2 doors)	
100-0072 (track) (75 lbs/door, 2 doors)	40-2323 (track) (50 lbs/door, 2 doors)	
100-0096 (track) (75 lbs/door, 2 doors)	40-2324 (track) (50 lbs/door, 2 doors)	1201-8
100-0144 (track) (75 lbs/door, 2 doors)	-	1201-12
1031FD02 (Bi-Fold hdw set)	40-2308 (pivots) + 40-2303 (hangers)	1260 (175 lb)
Pocket Door Hardware		
100-0060 (track)	-	
100-0072 (track)	40-5104 (track)	7001-6
100-0096 (track)	40-5105 (track)	7001-8
100-0144 (track)	40-5107 (track)	
10311002 (125 lb. hdw set) or 10311005 (200 lb. hdw set)	64690 (top hangers) plus 40-3993 (1-3/8" door guide) or 40-3997 (1-3/4" door guide)	71-222

CABINET SLIDING SYSTEM




CABINET SLIDING SYSTEM AL 1535 for 2 Wood Doors

- Load Capacity: 33 lbs/door, ANSI-BHMA, Grade 1
- 2 panels can be installed left or right. 2 sets installed in opposite directions can close an opening up to 10'.
- Ball bearing quality rollers for a silent, smooth glide
- Min door thickness: 5/8" wood




Aluminum



Carrier Track CXE Flush mount top/bottom



Carrier AL 1535 Wood

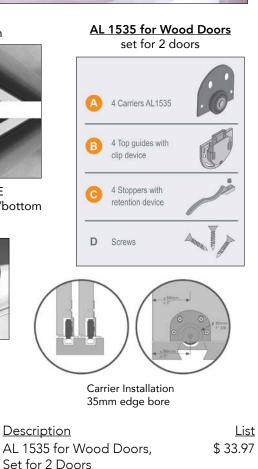

CABINET SLIDING SYSTEM AL 1535 for 2 Glass Doors

- Load Capacity: 33 lbs/door, ANSI-BHMA, Grade 1
- Clip on upper guide allows for easy mount and dismount of door
- Anodized aluminum track flush mounted for a concealed clean look



Aluminum AL 1535 for Glass Doors set for 2 doors 4 Carriers AL1535 4 Top guides w/ clip device Carrier Track CXE Flush mount top/bottom 8 Finishing caps 4 Stoppers with retention device Screws E Carrier AL 1535 Glass Carrier Installation

<u>List</u>	<u>Code</u>	<u>Description</u>	<u>List</u>
\$ 33.97	012102	AL 1535 for Glass Doors,	\$ 36.40
		Set for 2 Doors	
	021CXE1	CXE Inset AL 1535, 6.5'	10.11
17.40	021CXE2	CXE Inset AL 1535, 9.85'	17.40

CXE Inset AL 1535, 6.5'

CXE Inset AL 1535, 9.85'

Dealer No. A

Code

012103

021CXE1

021CXE2

FURNITURE FLOOR SLIDING

D 25 Floor Sliding System for Wood Doors

- Load capacity: 33 lbs/door
- Ball bearing quality rollers for a silent and smooth glide
- Min door thickness: 5/8"



D 25

carrier set

Track D 25 PVC Available in Four Colors



FLOOR SLIDING SYSTEM

FURNITURE FLOOR SLIDING

AL 1540 Floor Sliding System for Wood/Alum Doors

- Load capacity: 33 lbs/door
- FCX track allows for **overlay** door installation can be installed directly on the cabinet face frame
- CXE track allows for inset door installation
- Ball bearing quality rollers for a silent and smooth glide • Stoppers installed inside the track will hold the door in position
- Min door thickness: 5/8"





<u>Code</u>	<u>Description</u>	<u>List</u>	<u>Code</u>	<u>Description</u>	<u>List</u>
012101	D 25 Hardware Kit for 2 Doors	\$ 14.22	012404	AL 1540 Hardware Kit for 1 Door	\$ 33.53
024D252-WT	D 25 PVC Track, White, 9.85'	13.55	021FCX2	AL 1540 Overlay Track FCX, 9.85'	30.99
024D252-BR	D 25 PVC Track, Brown, 9.85'	13.55	041ALX2	AL 1540 Fascia LX, 9.85′	20.32
024D252-BL	D 25 PVC Track, Black, 9.85'	13.55	021CXE1	AL 1540 Flush Mnt Track CXE, 6.5'	10.11
024D252-SV	D 25 PVC Track, Silver, 9.85'	13.55	021CXE2	AL 1540 Flush Mnt Track CXE, 9.85'	17.40


door inset



FURNITURE FLOOR SLIDING CD 30 CX Floor Sliding System for Wood/Alum Doors




- Load capacity: 66 lbs/door
- Easy installation of flush mounted aluminum track
- Carriers can be flush mounted or surface mounted
- Min door thickness: 5/8"




Carrier Track CXE Flush mount top/bottom



Carrier CD 30 CX










Folding system for doors installed to overlay the opening. Ideal for closet applications. Includes Euro hinges to fix the door to the lateral. The system can be applied to right or left door.

- Load Capacity: 44 lbs / Door.
- Door Thickness: 3/4"
- Max. Door Width: 19-11/16"
- Min. Door Frame Height: 1-3/4"
- Ultra-smooth and quiet aluminum track with ballbearing rollers.






Carrier PL2550



Track PL25



Carrier Installation

<u>Code</u>	Description	<u>List</u>			
10100117092	CD 30 CX Carrier Set,	\$ 31.14	<u>Code</u>	<u>Description</u>	<u>List</u>
	Set for 1 Door		011303	PL2550, Carrier Set for 2 panels	\$ 52.52
021CXE1	Track CXE AL, 6.5'	10.11	021PL251	PL25 Track 6.5'	42.77
021CXE2	Track CXE AL, 9.85'	17.40	021PL252	PL25 Track 9.85'	53.99

i • ...

10 1 25/6

Code

TOP SLIDING CLOSET

CA 4585 System for Wood Doors

- Load capacity: 66 lbs/door
- 8 safety clips assure that the door will not jump out of the track
- Aluminum anodized double tracks for easy installation
- ٠ Ball bearing quality rollers for silent, smooth glide
- Min door thickness: 3/4"



Track U28


Carrier CA 4585

1-9/16"






3/4" - 7/8"




Track U28-35 For Door Thickness: 3/4" - 1-3/8"



Code Description CA 4585 Carrier set for 2 doors 011205 \$40.64 DoubleTrack U28 AL, 6.5' 45.05 021U281 021U28-12 DoubleTrack U28 AL, 12' 82.31






CD 40 CX System for Wood or Aluminum Doors

- Load capacity: 88 lbs/door
- Multiple doors can be installed side by side for longer openings
- Options of flush or surface mount carrier tracks
- Double aluminum track allows for an easy and fast ٠ installation
- Ball bearing quality rollers for silent, smooth glide
- Min door thickness: 5/8"



Top Guide GD50 AL




Double Carrier Track CXD



CLOSET SYSTEMS



Single Surface Mount Track CX AL



Flush Mount Track CXE AL

<u>Description</u>	<u>List</u>
CD 40 CX, Carrier set for 2 doors	\$ 60.96
Top Guide GD50 AL, 6.5'	36.07
Top Guide GD50 AL, 9.85'	54.19
Top Guide GD50 AL, 12'	66.05
Dble Surface Mt Track CXD AL, 6.5'	29.47
Dble Surface Mt Track CXD AL, 9.85'	44.03
Dble Surface Mt Track CXD AL, 12'	57.10
Single Surface Mt Track CX AL, 6.5'	20.32
Single Surface Mt Track CX AL, 9.85'	30.83
Single Surface Mt Track CX AL, 12'	38.95
Flush Mt Track CXE AL, 6.5'	10.11
Flush Mt Track CXE AL, 9.85'	17.40
	CD 40 CX, Carrier set for 2 doors Top Guide GD50 AL, 6.5' Top Guide GD50 AL, 9.85' Top Guide GD50 AL, 12' Dble Surface Mt Track CXD AL, 6.5' Dble Surface Mt Track CXD AL, 9.85' Dble Surface Mt Track CXD AL, 12' Single Surface Mt Track CX AL, 6.5' Single Surface Mt Track CX AL, 9.85' Single Surface Mt Track CX AL, 9.85' Single Surface Mt Track CX AL, 12' Flush Mt Track CXE AL, 6.5'

CD 40 CX Carrier set for 2 doors



Carrier Bore: 38-40mm

List

CLOSET SYSTEMS

DUCASSE

TOP SLIDING CLOSET

DN 50 CLIP System for Wood Doors / Clip-On Carrier

- Load capacity: 110 lbs/door
- <u>Clip-on installation</u> feature provides fast and easy mount and dismount.
- Extremely quiet movement
- Stoppers installed inside the track will retain the door in position
- Min door thickness: 3/4"- 1-3/8", minimum gap 2mm between door and track




Clip-On Carrier

- Height adjustable
- Sealed ball bearings




Carrier DN 50 Clip



1-3/32″

Track U45 RT Smooth AL Double Track

For Door Thickness: 3/4" - 1-3/8"





DN 50 CLIP


<u>Code</u>	Description	<u>List</u>
10100256051	DN 50 Clip set for 2 doors	\$ 88.06
021U45-08	Track U45 AL, 8'	59.27
021U45-12	Track U45 AL, 12'	88.06
021U45DRT351	Track U45 RT Smooth AL, 6.5'	96.53
021U45DRT352	Track U45 RT Smooth AL, 9.85'	143.95



D 52 System for Wood or Aluminum Doors

- Load capacity: 110 lbs/door
- Multiple doors can be installed side by side for longer openings
- Carrier can be installed **inset** for minimum 12mm gap between doors, or **surface mounted** for 15mm gap
- Ball bearing rollers for silent, smooth glide





<u>D 52</u> set for 2 doors

4 D52 Carriers

1 Bumper

Screws

D

4 D52 Top Guides

Overlay Carrier

Inset Carrier


1.

6

NI/



Carrier D 52



Guide Track D 52 AL



Carrier Track D 52 AL

	<u>Code</u>	Description	<u>List</u>
	10100106201	D 52 Set for 2 Doors	\$ 44.03
<u>st</u>	1010058200	Guide D 52 AL, 6.5'	14.56
)6	1010058300	Guide D 52 AL, 9.85'	22.01
27	1010058-12	Guide D 52 AL, 12'	27.09
)6	1010057200	Track D 52 AL, 6.5'	14.56
53	1010057300	Track D 52 AL, 9.85'	22.01
25	1010057-12	Track D52 AL, 12'	27.09

Dealer No. A

TOP SLIDING

DUCASSE



TOP SLIDING SYSTEM DN 50 for Wood Doors up to 110 lbs.

Top sliding system for

closet doors

and grime

wood doors up to 110 lbs.

applications and bypass

• Min door thickness: 3/4",

between door and track

for barn door installations

Carrier with enclosed ball

DN 50

set for 1 door

2 Carriers DN 50

2 Stoppers with retention device

1 Floor guide GP-12

2 Mounting plate

Screws

bearings seals out dust

• Optional lateral brackets


minimum gap 1/2"







Carrier DN 50

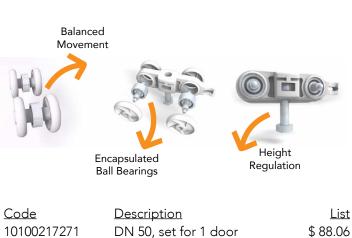

1-3/32"

59.27 021U45-08 Track U45 AL, 8' 021U45-12 Track U45 AL, 12' 88.06 96.53 021U45DRT351 Track U45 RT Smooth AL, 6.5' 021U45DRT352 Track U45 RT Smooth AL, 9.85' 143.95

TOP SLIDING SYSTEM


DN 50 SP Kit for Wood Doors up to 110 lbs.








Fascia / Track U45 AL



Hidden Connector / Cap



Concealed Brackets

Code DN50SP-KIT

Description DN 50 SP Kit (includes hdwr & 6.5' U45 Track for 1 door)

<u>List</u> \$180.12

- Complete Kit to install one door overlaying the opening (barn door style) or standard top mount without the fascia, brackets and caps.
- Carrier with enclosed ball bearings seals out dust and grime
- Stoppers inside the track retain the door in position

DN50SP-KIT contains:



BI-FOLD DOOR SYSTEM

DUCASSE




BI-FOLD DOOR SYSTEM

DN 80 PL 2 Folding System for 2 heavy doors



- Load Cap: 88 lbs/door, ANSI-BHMA, Grade 1
- Ultra-smooth and quiet, aluminum track and ball-bearing rollers
- For doors up to 29-1/2"
- Min door thickness: 13/16" •



Carrier DN 80 PL



1-3/8"



Carrier Installation


Track Installation

Track U21

D



DN 80 PL 2 set for 2 panels




<u>Code</u>	<u>Description</u>	<u>List</u>
013301	DN 80 PL 2, 2 panels carrier	\$ 45.57
021U211	DN 80 CF Track 6.5'	78.47
021U21-8	DN 80 CF Track 8'	86.53
021U21-12	DN 80 CF Track 12'	132.14
021U213	DN 80 CF Track 19.7'	260.00

BI-FOLD DOOR SYSTEM

DN 80 PL 4 Folding System for 4 heavy doors



- Load Cap: 88 lbs/door ANSI-BHMA, Grade 1
- Ultra-smooth and quiet, aluminum track and ball-bearing rollers
- For doors up to 29-1/2"
- Min door thckns: 13/16"



Track

Installation Installation

Guide Installation

2 Carrier DN 80

1 Upper fixed base/ pivot

I Lower fixed base/ pivot

9 Central hinges

2 Guides GC-16

Regulation key F

G 1 Aligner H 2 Mounting plate

i. Screws

8

DN 80 PL 4


set for 4 panels




Floor Guide Track

Carrier





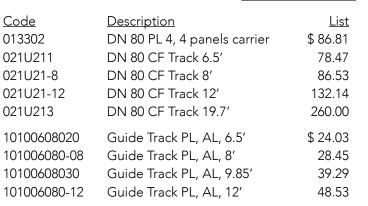

Dealer No. A

Configuration Examples

DUCASSE

TOP FOLDING DOOR SYSTEM

Þ

<u>Concealed Top Folding System for Wood Doors</u> Tauro Wood PLMD - 50



- Up to **110 lbs** per panel and max of 660 lbs in the stacking area
- Modular system: up to six panels per side
- For partitions, meeting rooms, family rooms
- Concealed "Soss" type hinges for a clean look when closed
- Floor Guide track for smooth folding
- Concealed bottom roller guide with height adjustment
- Spring-aligner keeps doors flat in a closed position
- Top bracket-aligner will prevent over extension of doors
- Maximum flexibility to make your own set up
- Door Thickness: 1-19/64" min
- Max Door Width: 29-1/2"
- Gap between Door and Track: 5/16"
- Gap between Door and Floor: 7/64"




1010060569-12 U150 Track Smooth 12'




101006080-12 Guide Track 12'

<u>Code</u>	<u>Description</u>	<u>List</u>
10300001451	Tauro Wood 2 Panel Kit	\$ 1640.00
10300001453	Tauro Wood Kit +2 Panels	1095.00
10300001455	Tauro Wood Pivot Door Kit	869.46
1010060569-12	U150 Smooth, 12'	374.07
101006080-12	Guide Track PL, 12'	48.53





2 Panel Kit and 2 Panel Kit



 Kit + 2 Panels TAURO WOOD

 PART NUMBER:1030001453

 (A) 1 Set Tauro PLMD 50
 (A)

 (B) 1 Bottom roller guide
 (A)

 (C) 2 PLMD End Caps
 (A)

 (D) 2 Mounting plates
 (A)

 (E) 6 Concesled hinges
 (A)


 (E) 1 Spring Aligner PLMD
 (A)

 (B) 1 Bracket Aligner PLMD
 (A)


 (H) 1 Segmenta key
 (A)

 (I) Screws
 (A)

2 Panel Kit and +2 Panels



2 Panel Kit and Pivot Door Kit





Dealer No. A

TOP SLIDE DOOR SYSTEM

DUCASSE




TOP SLIDING DOOR SYSTEM


- DN 80 CF for Wood or Aluminum Doors, 176 lb/ Door
- 176 lb. load capacity, ANSI-BHMA Grade 1
- Ultra-smooth and quiet, aluminum track and ball-bearing rollers
- Minimum Door Thickness: 13/16"
- Door-Track Gap: 17 23mm, Door-Floor Gap: 10mm
- Instop holds door No bounce
- Standard inlay installation
- Optional Easy Soft avoids doors from bumping and ensures the doors are always closed (see next page)
- Optional U21 Fascia and End Caps easily connect to track with a snap providing a clean, solid and elegant look (see page 440)



Carrier DN 80 CF



Track U21

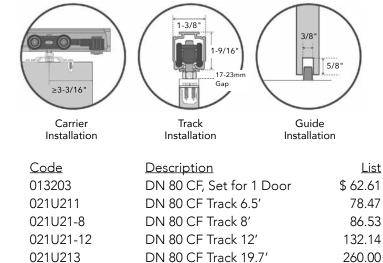



GLASS SLIDING SYSTEM

DN 80 VD Compression, 176 lb/ door

- For Glass Doors 3/8" 1/2" thick
- Load Cap: 176 lbs, ANSI-BHMA, Grade 1
- Compression clamps avoid the need to bore glass
- For complete kit you will need:
 - (1) DN 80 VD set for one door
 - (1) Compression Clamp Kit
 - (1) Spacer Kit (for either 3/8" or 1/2" panels)
- Use above U21 Tracks

	<u>Description</u>	<u>List</u>
5	DN 80 VD, set for one panel	\$ 63.69
001501	Compression Clamp Kit	230.51
3	Spacer Kit 3/8" (8-10mm)	24.26
7	Spacer Kit 1/2" (12-13mm)	24.26

DN 80 VD set for 1 door



Compression Clamp Kit & DN 80 VD (shown w/ fascia)











DN 80 CF set for 1 door

SOFT CLOSE TOP SLIDE

(C) -

2 Easy Soft DN80 +

1 Kit Annex DN80CF

Mín. 870

Mín. 34-1/4"



Easy Soft DN 80

Concealed Soft-Close for Doors between 110 - 176 lbs.



Soft Close for Sliding Doors

40mm

1-5/8"

The Easy Soft DN 80 is a soft close system made of 2 parts: 1 Easy Soft DN 80 Kit and 1 Annex Kit. Use 1 Easy Soft DN 80 for soft close in one direction only. Use 2 of them for soft close in both directions.

Use DN 80 CF or DN 80 FT Annex Kits depending on mounting type and door thickness. Minimum door width with 1 Easy Soft: 21-3/4", 2 Easy Soft: 31-1/4". Use with U 21 Tracks.

> Finished opening height - door height: 2-7/8" (73mm) Finished floor to door bottom: 7/16" - 5/8" (10-15mm) Top of door to bottom of track: 13/16" - 1" (20-25mm)

1 Easy Soft DN80 +

1 Kit Annex DN80CF

Easy Soft DN80 CF Annex Kit : Door Thickness ≥ 13/16" (20mm)

0=01.


40mm

1-5/8"





Std. 3/4" gap between track and door



DN 80 CF Track 8'

DN 80 CF Track 12'

DN 80 CF Track 19.7'

Easy Soft DN 80 / For 1 door

021U21-8

021U21-12 021U213

Easy Soft DN80 FT Annex Kit : Door Thickness \geq 1" (25mm)




Mín. 550

Mín. 21-3/4"

54 mm minimum 2-1/8" 2 Easy Soft DN80 + 1 Kit Annex DN80FT Mín. 870 Mín. 34-1/4" Annex Kit DN 80 CF

1 Soft Close DN 80	(()))			Pack: 10/Ctn	
1 ES Activator	W	-		<u>Code</u>	<u>List/ea</u>
1 DN 80 Carrier			1	10107026486	\$ 13.55
1 Stopper with retension device		Track U21			
Screws					
				<u>Annex Kit DN</u>	<u>80 FT</u>
<u>Code</u>	Description		<u>List</u>	Pack: 10/Ctn	
10107026485	Easy Soft DN 8	30	\$ 132.09		
021U211	DN 80 CF Trac	:k 6.5′	78.47	<u>Code</u>	<u>List/ea</u>

2 DN 80 CF mounting plates	Col Me
2 Carrier bolts	ananali
4 Hex Nuts	9
1 Guide GPR 850	Å
Screws	



•101=10

86.53

132.14

260.00

10107026487

\$27.02

TOP SLIDE DOOR SYSTEM

SLIDING DOOR SYSTEM DN Concealed LT, 176 lbs/ door





DN 80 Concealed FT, 176 lb/ door

. 1/8" gap Between Door and Track

DUCASSE






Concealed LT



Track U21

- 1/8" gap between door and track
- 176 lb. load capacity
- Minimum Door Thickness: 1-1/8"
- Ultra-smooth and quiet, aluminum track and ballbearing rollers
- Instop holds door No bounce. (Not for pocket door installation)





<u>Code</u>	Description	<u>List</u>	<u>Code</u>	Description
013213	DN 80 Concealed LT, set for 1 door	\$ 95.08	013206	DN 80 Concealed FT, set for 1 door
021U211	DN 80 CF Track 6.5'	78.47	021U211	DN 80 CF Track 6.5'
021U21-8	DN 80 CF Track 8'	86.53	021U21-8	DN 80 CF Track 8'
021U21-12	DN 80 CF Track 12'	132.14	021U21-12	DN 80 CF Track 12'
021U213	DN 80 CF Track 19.7'	260.00	021U213	DN 80 CF Track 19.7'




- 1/8" gap between door and track
- 176 lb. load capacity
- Minimum Door Thickness: 1"
- Mounting plates allow for "lift-up" installation, ideal for pocket doors



DN 80 Concealed FT set for 1 door

Carrier DN 80 Concealed FT



2 Carriers DN 80 2 Stoppers with retention device 1 Floor guide GP-12 2 Mounting plate E Regulation key Screws E

Track U21

1-3/8 >2-7/16 **Fixed Panel** 1/8" gap between

Track Installation

track and door

		5/
		/
	Gu	uide
	Insta	llation

List \$106.50

> 78.47 86.53 132.14 260.00

132.14	021021-12	DN 80 CF Trac
260.00	021U213	DN 80 CF Trac
Deale	r No. A	

435

TOP SLIDE DOOR SYSTEM

DUCASSE



SYNCHRO TWIN TELESCOPING WOOD

Load Capacity: 176 lbs. per door


	-	-	The second s
	-		
and a		=	
		=	
1			
100			

- For 2 bypassing synchronized doors that will open in the same direction with only one movement
- Allows for door widths up to 60"
- Ball bearing high quality rollers for a silent smooth glide
- No bounce: Instop holds door
- Stoppers with retention device concealed in the track
- Door thickness: 13/16" to 1-3/8"
- Door-Track Gap: 1" Door-Floor Gap: 25/64"






- 176 lbs. ANSI - BHMA Grade 1
- Ultra-smooth, quiet
- Use the DN 80 Track



Guide Installation



giar.

Code **Description** <u>List</u> 10300001399 Twin Telescopic Kit for Wood \$ 695.65 021U211 DN 80 CF Track 6.5' 78.47 DN 80 CF Track 8' 021U21-8 86.53 021U21-12 DN 80 CF Track 12' 132.14 DN 80 CF Track 19.7' 021U213 260.00

SYNCHRO TWIN OPPOSITE WOOD Load Capacity: 176 lbs. per door



- System for synchronized doors that will open in opposite directions by only opening one door
- Allows for door widths up to 60"
- Door can be installed to overlay the opening or 'barn door' style using wide lateral brackets
- Ball bearing high quality rollers for a silent smooth glide
- Stoppers with retention device concealed in the track
- No bounce: Instop holds door
- Door thickness: 13/16" to 1-1/2"
- Door-Track Gap: 1" Door-Floor Gap: 25/64"

Twin Opposite Wood Kit for 2 Doors #10300001404 includes:

		alla-
0	4 Carriers DN 80 CF	T
B	4 Twin mounting plates with cable fastener	and a star
C	2 Stoppers with retention device	-
O	2 GP 12 guide	N.
E	2 Stoppers with polley	-
F	4 mounting plates	A STORE
G	4,2 mt - 13 7" of cable	
н	Screws	Al,



Track

 Use the DN 80 Track

Carrier Installation Installation

Guide Installation

<u>Code</u>	Description	<u>List</u>
10300001404	Twin Opposite Kit for Wood	\$ 695.65
021U211	DN 80 CF Track 6.5'	78.47
021U21-8	DN 80 CF Track 8'	86.53
021U21-12	DN 80 CF Track 12'	132.14
021U213	DN 80 CF Track 19.7'	260.00

DUCASSE

TOP SLIDE DOOR SYSTEM

TOP SLIDING PARTITION


DN 150 Concealed FT for Pocket Doors

- Load capacity: 330 lbs/door
- FT Carrier allows smaller gap between door/track
- Door-Track Gap: 16mm Door-Floor Gap: 4mm
- Unique mounting plates allow for a 'lift up' installation; ideal for pocket door solutions
- Optional wide barn door brkt and fascia for U150 track
- Ball bearing high quality rollers for silent, smooth glide
- Min door thickness: 1"





Carrier DN 150 FT 330 lbs/door



DN 150 FT carrier set for 1 door

2 Carriers

DN 150 FT

2 Stoppers with

1 Floor Guide

2 Mounting

1 Segmenta Key

Plates

Screws

D

E

F

retention device

<u>Code</u>	Description	<u>List</u>
10100219525	Carrier Set for 1 door	\$ 220.15
1010060569-08	Track U150 Smooth AL, 8'	208.30
10100605693	Track U150 Smooth AL, 9.85′	254.01
1010060569-12	Track U150 Smooth AL, 12'	374.07
10100605696	Track U150 Smooth AL, 19.7'	508.03
021U1501	Track U150 AL, 6.5'	151.65
021U1502	Track U150 AL, 9.85′	227.46
021U1504	Track U150 AL, 12'	324.82
021U1503	Track U150 AL, 19.7'	526.49

EASY SOFT DN 150

Provides Soft Close for 1 Door (Use with DN 150 systems)

- Load capacity: 187-330 lbs/door
- System made of 2 components: The Easy Soft DN 150 and Kit Annex Easy Soft DN 150. Combinations of both provide 1 door with 1 or 2 soft closes (see below)
- System hidden in track making it a concealed soft close
- Avoids doors from bumping and insures the doors are always closed





Easy Soft DN 150

Kit Annex Easy Soft DN 150

Installation with Soft Close on 1 side: Easy Soft DN 150 + Kit Annex DN 150

(OFO	0
di	> 640 mm
	25-13/64" min

Installation with Soft Close on 2 sides: 2 Easy Soft DN 150



Easy Soft DN 150 Set for 1 door 1 Soft Close DN 150



Kit Annex DN 150 Set for 1 door 1 Carrier DN A 150 CF B 2 Stoppers with retention device C 1 Mounting Plate D Screws * For use with Tracks U150 AL and U150 Smooth AL

<u>Code</u>	Description	<u>List</u>
10107026510	Easy Soft DN 150, for 1 Door	\$ 304.82
10107026520	Kit Annex DN 150, for 1 Door	67.74
10107026525	Kit Annex DN 150 FT, for 1 Door	67.74



HEAVY DUTY TOP SLIDING DOOR SYSTEM DN 150 CF, Load Cap: 330 lbs/ door



- 330 lb. load cap, ANSI-BHMA Grade 1
- Ultra-smooth and quiet, aluminum track and ballbearing rollers
- Minimum Door Thickness: 1-3/16"
- Instop holds door No bounce
- Lateral Bracket 023BRAU21W will allow installation of the track to the wall ("Barn Door" effect)

Install Easy Soft DN 150 for Soft Close Feature see previous page for details.

Carrier DN 150 CF

Track U150 AL

45 mm

DN 150 CF Set for 1 door 2 Carriers DN 150 CF 2 Stoppers with retention device 1 Floor Guide D 2 Mounting Plates E 1 Segmenta Key F Screws



Track Installation



Guide Installation

<u>Code</u>	<u>Description</u>	<u>List</u>
013220	DN 150 CF Hardware Kit	\$ 132.00
021U1501	Track U150 AL, 6.5′	151.65
021U1502	Track U150 AL, 9.85′	227.46
021U1504	Track U150 AL, 12'	324.82
021U1503	Track U150 AL, 19.7′	526.49
023BRAU21W	"Barn Door" Wide Bracket	28.91

"BARN DOOR" BRACKETS

Allows Door Track to be installed on wall.

Can be used with: **DN 80 CF** DN 80 Concealed FT DN 80 Concealed LT DN 150 CF (023BRAU21W only)


Wide




ACCESSORIES



Lateral Installation



44.7mm 1-3/4"





023BRAU21

1-1/4"

023BRAU21W Std.

Wide





Small Brackets: 3-7/8" Length, Packed: 2 per bag.

<u>Code</u>	Description	<u>List/bg</u>
023BRAU21	Standard Bracket, 1-1/4"	\$ 18.24
023BRAU21W	Wide Bracket, 1-3/4"	28.91


Long Brackets: 2 Lengths avail, Packed: 10 ea/Ctn.

021BRAU21W-2	Wide Bracket, 1-3/4" x 2m (6.5 ft)	\$ 77.90
021BRAU21W-3	Wide Bracket, 1-3/4" x 3m (9.85 ft)	116.85

www.macpac1.com Fax (415) 552-5840


ACCESSORIES

DUCASSE

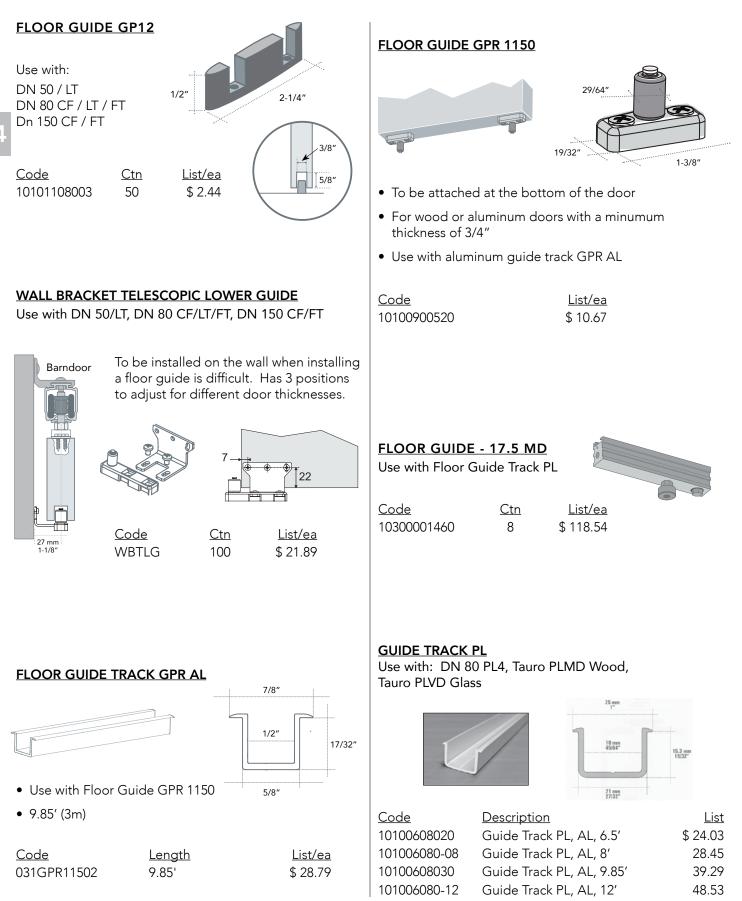

ACCESSORIES


DUCASSE



Accessory for U21 Track to install when the ends of the track are visible.







List/pr

\$8.59

<u>Code</u> 10100910020

Description U21 End Cap

U21 END CAP W/ FASCIA

For U21 Track w/ Fascia

Accessory for U21 Track and U21 Double Track with Fascia to install when the ends of the track are visible.

48.4 mm 1*29/32

123.3 mm 4*7/8

0


69.2 mm 2°3/4



10100910018



10100910019



Description U21 End Cap w/ 2-3/4" Fascia U21 End Cap w/ 4-7/8" Fascia


List/pr \$13.20 24.36


48,4 mm 1"29/32

U21 FASCIA

For U21 Track or U21 Double Track

Anodized aluminum fascia for U21 track. It gives a clean and elegant look to your project. Available in 2 different heights and various lengths. Not for use on "Smooth" style track.





120 mm


Fascia U21 66mm Ht (2-5/8") Fascia U21 120mm Ht (4-3/4")


<u>Code</u>	<u>Description</u>	<u>List</u>
041U21661	Fascia U21, 2-5/8″ Ht, 6.5′	\$ 54.55
041U2166-08	Fascia U21, 2-5/8″ Ht, 8′	64.35
041U21662	Fascia U21, 2-5/8″ Ht, 9.85′	81.07
041U2166-12	Fascia U21, 2-5/8″ Ht, 12′	80.29
041U211201	Fascia U21, 4-3/4″ Ht, 6.5′	\$ 95.84
041U211202	Fascia U21, 4-3/4″ Ht, 9.85′	143.66

U150 FASCIA

For U150 Track

Anodized aluminum fascia for a clean look. Not for use on "Smooth" style track.





Fascia U150, 3" Ht

<u>Code</u>	<u>Description</u>	<u>List</u>
041U15076-08	Fascia U150, 3″ Ht, 8′	\$ 77.90
041U150762	Fascia U150, 3″ Ht, 9.85′	90.90
041U15076-12	Fascia U150, 3″ Ht, 12′	115.81

TRACK



TRACK U21 RT (SMOOTH): A finished look for seamless exposed track


Use with: DN 80 PL2, DN 80 PL4, DN 80 LT, DN 80 FT, DN 80 VD, Twin Telescopic Wood (and Glass), Twin **Opposite Wood (and Glass)**



	, 21 mm ,	38 mr
		4
-	10 mm	

<u>Code</u>	Description	<u>List</u>
10100626082	Track U21 RT AL Smooth, 6.5'	\$ 77.90
10100626083	Track U21 RT AL Smooth, 9.85'	116.85
1010062608-12	Track U21 RT AL Smooth, 12'	150.72
10100626086	Track U21 RT AL Smooth, 19.7'	287.00

TRACK U21 DOUBLE: Faster installation of double track Use with: Twin Telescopic Wood (and Glass), DN 80 CF, DN 80 LT, DN 80 FT, DN 80 VD




<u>Code</u>	<u>Description</u>	<u>List</u>
10100603020	Track U21 Double, 6.5′	\$ 162.57
101006030-08	Track U21 Double, 8'	203.21
10100603030	Track U21 Double, 9.85′	243.85
101006030-12	Track U21 Double, 12'	301.43

TRACK U21 CA (WITH WINGS):

To Mount flush with finished ceiling

Use with: DN 80 LT, DN 80 FT, DN 80 VD




Code **Description** Track U21 CA, w/ Wings, 9.85' 10100626093 1010062609-12 Track U21 CA, w/ Wings, 12'

TRACK U150 AL: Heavy duty track

Use with: DN 150 CF, DN 150 VD






<u>Code</u>	<u>Description</u>	<u>List</u>
021U1501	Track U150 AL, 6.5'	\$ 151.65
021U1502	Track U150 AL, 9.85'	227.46
021U1504	Track U150 AL, 12'	324.82
021U1503	Track U150 AL, 19.7'	526.49

TRACK U150 (SMOOTH) Heavy duty track, finished look

Use with: Tauro PLMD Wood, Tauro PLVD Glass, DN 150 CF, DN 150 VD




<u>Code</u>	Description	<u>List</u>
1010060569-08	Track U150 Smooth AL, 8'	\$ 208.30
10100605693	Track U150 Smooth AL, 9.85'	254.01
1010060569-12	Track U150 Smooth AL, 12'	374.07
10100605696	Track U150 Smooth AL, 19.7′	508.03

TRACK U45 RT SMOOTH DOUBLE AL

Use with DN 50 CLIP System

- For Door Thickness 3/4" 1-3/8"
- Available in 6.5' (2m) and 9.85' (3m)





<u>List</u> <u>Code</u> \$130.39 021U45DRT351 167.64 021U45DRT352 **Description** <u>List/ea</u> Track U45DRT, 6.5' \$96.53 Track U45DRT, 9.85' 143.95

DUCASSE



Flat Track by Leatherneck Hardware, Inc. **Designer Sliding Door Hardware**

Flat Track Hardware styling dates back to the turn of the century when it was used in warehouses and industrial settings. Today this look is perfect for unique interior/exterior applications. The hardware can be customized for specific applications, is space saving, and will enhance any opening. Available in clean, simple styling or can be designed to be ornate depending on the application. Comes in several finishes and styles.

Capacities are 400 lb and 800 lb units.

Flat Track Hardware is available for order in complete kits for single slide openings. The hardware can also be ordered as individual components.

142 Hanger Styles / 400 lbs.

11" Length




401 Arrowhead



407 Top Mount

Finishes

00 Flat Black



402

Straight



I - Shape

25 Unfinished



410 Teardrop

27 Clear Coated



403

411



403 DBHH



60



Weathered Rust





Bronze



Please note the following:

To compose a complete order for one 1-3/4" door, the following items are needed:

- 2 Hangers
- 1 Flat Track
- 2 Door Stops •
- 2 Anti-Jump Blocks

30 Machine Polished

- 1 Fin Guide
- Mounting Screws (amount dependent on track size)

All Special Order



- Drop Ship, FOB Danville, Illinois
- Check out www.doorhdwe.com for more information

144 Hanger Styles / 800 lbs. 21" Length

404

406 Industrial Wide Teardrop

Wheels

Teardrop

3" Standard Steel Wheels (avail in all finishes)

Other Wheel Styles Available:


2-1/2" Low Profile Steel Wheels, 3" Quiet Wheels (made from durable polymer material) and New Aluminum Spoke Wheels 402S: a highly stylized 6" Wheel. Interchangeable with #142 Hanger Styles.

405

Straight

80 Painted









Stainless Steel

50 Brushed Stainless Steel

















Leatherneck Hardware Kits

The following Leatherneck Kits Include:

- 2 ea. #402 Straight Hangers1 ea. #142 Flat Track2 ea. Door Stops2 ea. Anti-Jump Blocks
- 1 ea. Fin Guide Mounting Screws (amount dependent on track size)





Kit - Black Fi	nish	<u>List</u>	Kit - Brushed	d Nickel	List	Kit - Painted	Bronze	List
1024-0001	5' Track	\$ 373	1024-9001	5' Track	\$ 564	1024-8001	5' Track	\$ 560
1024-0002	6' Track	376	1024-9002	6' Track	569	1024-8002	6' Track	565
1024-0003	7' Track	390	1024-9003	7' Track	590	1024-8003	7' Track	584
1024-0004	8' Track	397	1024-9004	8' Track	600	1024-8004	8' Track	595
						I		









SLIDING TRACK SYSTEM

<u>Stainless Steel</u> <u>Sliding Track System</u>

Special Order

Configurations:

- Bi-parting (splice rod needed)
- Single

Features:

- Smooth & quiet operation with nylon coated stainless steel wheel
- Made of 304 stainless steel
- Hangers equipped with anti-rise pin so door cannot lift off track
- 176 lb (W60) / 198 lb (W100) panel capacity
- Tested to meet strict performance standards of ANSI/BHMA 156.14.

Installations:

- Side Wall Mount (only)
- Finish:
- Brushed Stainless Steel

Kits Include:

- 1 ea 304 Stainless Steel Track w/ End Caps and Wall Brackets
- 2 ea Stainless Steel Hangers
- 1 ea Door Bottom Guide for 3/8" undercut

W100 Kit - For 1-3/4" Wood Doors

2 ea Track Stops

Mounting / Installation Hardware

W60 Kit - For 1-3/4" Wood Doors



W60

Door Weight: Up to 176 lbs.

Hanger Height: 4-3/8″

		Track	Door	
<u>Part Number</u>	<u>Material</u>	<u>Length</u>	<u>Width</u>	<u>List</u>
W60/6	304 St Steel	78-3/4″	36″	\$ 494
W60/8	304 St Steel	98-7/16″	48″	552
Splicerod	Splice rod for Bi-Parting			180



W100

Door Weight: Up to 198 lbs.


Hanger Height: 3-13/16″


		Track	Door	
<u>Part Number</u>	<u>Material</u>	<u>Length</u>	<u>Width</u>	<u>List</u>
W100/6	304 St Steel	78-3/4″	36″	\$ 614
W100/8	304 St Steel	98-7/16"	48″	672
Splicerod	Splice rod for Bi-	Parting		180

Specs next page

SLIDING TRACK SYSTEM

W60 Series - For Wood Doors For Sliding Panels up to 176 lbs.

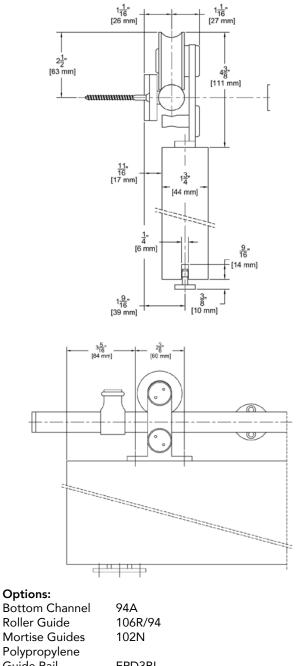





NOTE: Alternate route dimension when using optional EPD3BL

W100 Series - For Wood Doors

For Sliding Panels up to 198 lbs.

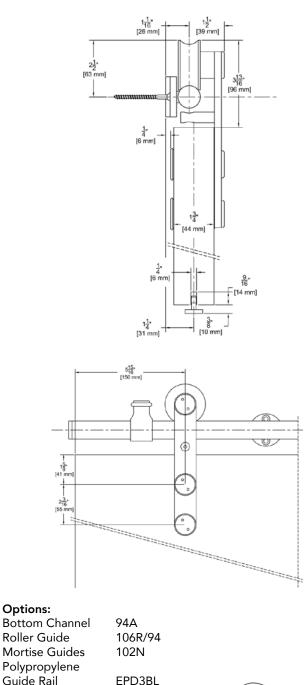



NOTE: Alternate route dimension when using optional EPD3BL

- 3/8

9/32

1 1/32

1/16

9/16

1

SLIDING DOOR TRACK

KV BULK PLASTIC TRACK

2416W-12

Low cost track for small, light doors. Fastens with brads or nails. For 1/4" or 3/4" doors only.

2412G 2412W 2416G 2416W **TRACK & GUIDES:** 12' Lengths Only. 10 pcs. per box. flush mount surface mount Code **Description** List 2412G-12 Guide, 12', Gray 1/4" \$ 15.18 2412W-12 Guide, 12', Walnut 1/4" 15.18 2416G-12 Track , 12', Gray 1/4" 10.27




Track , 12', Walnut 1/4"

Packaged set of low cost track for 1/8", 1/4", 1/2", or 3/4" doors. 10 set/carton.

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
P2413T-4	48" Tan, 1/8" Doors	\$ 15.51
P2413T-6	72" " " "	20.58
P2417T-4	48" Tan, 1/4" Doors	14.66
P2417T-5	60" " " "	18.30
P2417T-6	72" " " "	22.68
P2417W-4	48" Walnut, 1/4" Doors	14.88
P2417W-6	72" " " "	23.95
P2419T-4	48" Tan, 3/4" Doors	19.57
P2419T-5	60" " " "	23.50
P2419T-6	72" " " "	26.39
P2421T-4	48" Tan 1/2" Doors	15.65
P2421T-5	60" " "	18.66
P2421T-6	72" " " "	21.74


FIBRE TRACK & GLIDES

Fibre track and nylon glides for drawers and light weight sliding doors.

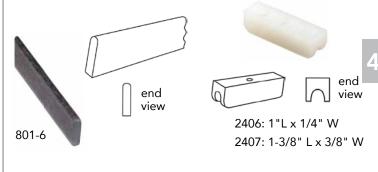

<u>Code</u>	<u>Description</u>	<u>Ctn</u>	<u>List/ea</u>
801-6	Track 1/8" x 1/2" x 6'	10 ea	\$ 12.07
2406	Nylon Glide, 1" long	50	.92
2407	Nylon Glide, 1-3/8" long	50	1.94

EXTRUDED GLASS/PANEL RETAINER



Clear, pliable plastic glass/panel retainer extrusion. Works well in cabinets with glass doors where back of door shows, and mirror-backed curios. 1000' per roll. Order by the foot.

<u>Code</u>	<u>1'</u>	<u>100'</u>	<u>1000'</u>
EGR-CLR	\$.70/ft	\$.44/ft	\$.38/ft

Amana 3 Wing Slot Cutter with 3 Wing cutter, arbor & ball-bearing. 5/32" size also used for 'biscuit-joint' cutting.

, ,	<u>Code</u>	<u>Kerf</u>	<u>Shank</u>	<u>List</u>
-	53407 Slot Cutter	5/32″	1/4″	\$ 36.24
,	53407-1* Slot Cutter	5/32″	1/2″	54.00
	* Special Order			


10.64

SLIDING DOOR TRACK

EPCO SLIDING DOOR TRACK

Polybagged with all Components and Installation Instructions.

For Wood & Glass Doors




Extruded aluminum sliding door track and guide system for heavier 1/4" by-passing doors. Serrated face is designed to provide an attractive finished fascia. Screws included.

For Door Thickness: 1/4" Door Type: Wood/Glass Made of aluminum with a Mill Aluminum finish.

8-A-6	<u>Code</u>	<u>Length</u>	<u>List/st</u>
	8-A-6	6'	\$ 69.77

For Wood Doors



Extruded aluminum sliding door track and guide system for heavier 1/2" by-passing doors. Serrated face is designed to provide an attractive finished fascia. Button glides provide a smooth sliding action. Screws included.

Door Type: Wood Made of aluminum with a Mill Aluminum finish.


10-A-6, 11-A-6


<u>Code</u>	<u>Length</u>	<u>Door Thickness</u>	<u>List/st</u>
10-A-6	6'	1/2"	\$ 70.96
11-A-6	6'	3/4"	73.78

KV P1092 - EZY ROLL ALUMINUM TRACK FOR SLIDING GLASS DOORS

Aluminum track assembly for sliding glass doors. Use on light, 1/4" glass doors. Consists of hardware for 1 pair of doors, overlapping 1". (Cut glass 1-1/4" less than opening vertically, allow for 1" overlap horizontally) Can be cut to size.








Surface Mount

<u>Code</u>	Description	<u>List</u>
P1092-3	Set with 36" Track Length	\$ 56.18/st
P1092-4	Set with 48" Track Length	62.99
P1092-5	Set with 60" Track Length	83.92
P1092-6	Set with 72" Track Length	91.91
1097KV	Spare Nylon Rollers	2.07/ea

KV P992 - EZY ROLL BALL-BEARING TRACK FOR SLIDING GLASS DOORS

Ball-bearing track for sliding glass doors. Use on 1/4" glass doors. Consists of hardware for 1 pair of doors, overlapping 1". (Cut glass 1-1/4" less than opening vertically, allow for 1" overlap horizontally)





P992 Track Assembly

Cross Section

<u>Code</u>	Description	<u>List</u>
P992-3	Set with 36" Track Length	\$ 103.44/st
P992-4	Set with 48" Track Length	120.29
P992-5	Set with 60" Track Length	155.41
P992-6	Set with 72" Track Length	159.88

KV SLIDING DOOR TRACK


KV track is used with KV rollers and sheaves for sliding wood doors. Note sheave numbers used with each style.




KV 455 Single track for sliding doors. With ridge up use 427, 429, 430, and 594 sheaves. With ridge down use 592 sheave. Stainless Steel finish. 12' lengths. 10 ea/ctn.



KV 467 Single track for sliding doors. Use with 427, 429, 430, 594 sheaves. Plain Steel finish. 12' lengths. 10 ea/ctn.

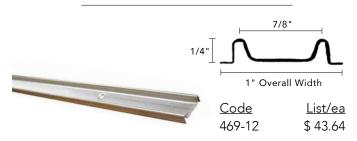

KV 469 Double track. Zinc plated steel. 1/4" high x 1" wide. 12' lengths. 10 ea/ctn.

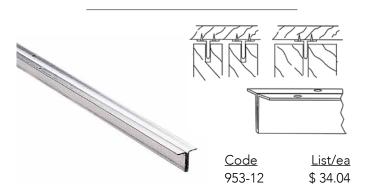

KV 953 Upper guide. Separates 2 sliding doors or use as a top guide for a single door. Pre-coated Steel. 5/8" W x 5/8" H. 12' lengths. 8 ea/ctn.

SLIDING DOOR HARDWARE

KV SLIDING DOOR SHEAVES



The 429 is a plain bearing sheave. The 427 & 430 are ball-bearing sheaves.

<u>Code</u>	<u>Wheel Dia.</u>	<u>Frame</u>	<u>Ctn</u>	<u>List/ea</u>
427KV	1-3/16"	2-15/16"x 1/2"	50	\$ 5.94
429	1"	2-1/4" x 3/8"	100	6.26
430KV	1-3/8"	2-3/4" x 1/2"	50	9.13



The 592 nylon sheave is for thin doors. Uses 455 track, inverted. 1-3/16" dia. roller. Frame: 9/32" x 2-1/4".



<u>Code</u>	<u>Ctn</u>	<u>List/ea</u>
582	100	\$ 4.62

Use with 467 track. Enclosed nylon sheave roller for light doors. Case size: 1-1/4" x 5/16". Screw fastened. Flange 2-1/4"x 5/16".



The 607 is a heavy duty sheave with a side fastening plate. Round groove, ball-bearing steel wheel. Zinc plated steel frame. Use with #455, #467, & #469 track. Frame: 2-5/16" x 1-5/16", Wheel dia: 1-3/8".

SLIDING DOOR SYSTEM

FLUSH SLIDING DOOR SYSTEMSpecial OrderMonoFlat UnisonSpecial Order



- Flush Surface: Designed to close flush against surrounding walls, providing clean appearance
- Unique Movement: Door moves in first, and then slides sideways
- Clean Appearance: No bottom rails on floor required on MFU-1000-R/L


Door Width	800~1000 mm (31-1/2"~39-3/8")	
Door Height	Max. 2500 mm (98-7/16")	
Door Thickness	*28~30 mm (1-3/32"~1-3/16")	
Door Weight	Max. 30 kg (66 lbs)	
	Depth: ±3.5 mm (1/8")	
Adjustability	Horizontal: ±4 mm (5/32")	
	Vertical: ±4 mm (5/32")	

*Can be used on door thicker than 30 mm (1-3/16") by mortising hanging bracket into the door.

- Flush Surface
- Designed to close flush against surrounding walls, providing clean appearance. • Unique Movement
- Door moves in first, and then slides sideways.
- Clean Appearance
 No bottom rails on floor required on MFU-1000-R/L

Note: Hardware must be installed onto a rigid frame, ceiling or wall to prevent door from falling off.

How the door moves:



All Special Order

<u>Code</u>	Description	<u>List</u>
MFU-1000-R	For Right-Hand Opening	\$ 960
MFU-1000-L	For Left-Hand Opening	960

SUGATSUNE



BI-PASSING DOOR HARDWARE

Hettich GRANT 7000 SERIES SLIDING DOOR HARDWARE

Bi-passing sets for doors up to 150 lbs. each.




- For 1-3/8" and 1-3/4" doors up to 150 lbs.
- Steel, precision ball-bearing wheels
- Aluminum Double "I" Beam track, jump proof
- Serrations in carrier aprons permit vertical adj.
- Headroom: 1-7/8" min, 2-1/8" max
- Floor guide nylon on steel

Must order Track and Hardware separately

Double Track 7003


Aluminum Extruded, pre-drilled holes





3 ⁷/₈" (98.4)

For Doors 1-3/8"



For Doors 1-3/4"

72-138 Hardware Set for 1-3/8" Doors

3/4

Set includes: (4) 7000 door carriers, (4) 7138 aprons, (1) 117 floor guide, screws, wrench and instructions







7000 Ball-bearing carrier, up to 150 lbs/door

7138 Apron 1-1/8" Offset

117 Floor guide

<u>Code</u> 7003-6 7003-8 7003-12	<u>Description</u> 6' Track 8' Track 12' Track	<u>Ctn</u> 5 ea. 5 5	<u>List</u> \$ 44.81 /ea 58.80 89.61
72-138	Hardware set for 1-3/8" Doors	20 sts	159.58/st
72-134	Hardware set for 1-3/4" Doors	20	174.33

72-134 Hardware Set for 1-3/4" Doors

Set includes: (4) 7000 door carriers, (2) 7034 aprons (front door), (2) 7138 aprons (rear door), (1) 118 floor guide, screws, wrench and instructions









7000 Ball-bearing carrier, up to 150 lbs/door

7034 Apron 3/4" Offset

7138 Apron 1-1/8" Offset

118 Floor guide